

Принадлежности, аксессуары для машин, для объективов, камер

Виды товаров: принадлежности, аксессуары для машин – щупы, адаптеры, удлинители, расширители, адаптерные пластины, коннекторы, ручки, поддоны, держатели, фиксаторы, многоуровневые стойки, вспененные блоки, референтные маркеры, поворотные тиски, штифты; аксессуары для объективов, камер – механизмы объектива, чистящие средства, ремешки, фильтры, металлические корпуса, солнечные панели, навесные замки, поддоны для батареи, антенны 4g и др.

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: zsf@nt-rt.ru || сайт: <https://zeiss.nt-rt.ru/>



Adapter Column D20 M12x1 - M6 MF - adjustable

600062-0210-085

Product Type	Column	Material	Stainl. St.
Application	Connect		



Reference sphere holder, 514 mm, M12 base
(reference sphere not included)

600332-9167-000

Product Type	Reference Sph...	Length (L)	514.0 mm
Material	Stainl. St.	Application	Tactile



THETA 55 pallet, M6 50x50, for MICURA

626109-9210-050

Product Type	Grid Pallet	Material	Aluminum
--------------	-------------	----------	----------

Application	Secure	Grid	Ohne
-------------	--------	------	------



OMEGA 543 pallet, spare glass insert

626109-8512-010

Product Type	Glass Insert	Material	Clear Glass
Application	Optical	Grid	Ohne



OMEGA 543 frame pallet, acrylic with temperature interface

626109-9512-027

Product Type	Frame Pallet	Material	Acrylic
Application	Secure	Grid	Ohne



Column D10 M6 - Adjustable

600062-0215-014

Product Type	Column	Length (L)	100.0 mm
Material	Stainl. St.	Application	Extend



Multi Sensor Rack Telescopic (MSR-T) Y=1280,
for CenterMax

626100-9305-000

Product Type	Sensor Rack	Material	Aluminum
Application	Store		



OMEGA 322 blank pallet

626109-9510-030

Product Type	Blank Pallet	Material	Aluminum
Application	Secure	Grid	Ohne



Temperature sensor (mini), angled, open cable
end


626140-9113-210



CMG grid plate 500×500×20, for DuraMax

600062-0117-000

Product Type	Grid Pallet	Length (L)	500.0 mm
Material	Aluminum	Application	Secure
Width (B)	500.0	Weight	12915.0 g
Grid	50 mm x 50 mm		



CMG Set ACCURA 2, 1200 X 1800 mm, 2 plates, M6, 50mm grid

600062-0210-276

Product Type	Grid Pallet	Length (L)	1800.0 mm
Material	Aluminum	Application	Secure
Width (B)	1200.0	Weight	176800.0 g
Grid	50 mm x 50 mm		



Complete reference sphere kit, DK 30, 514 mm, M12 base

600332-9267-000

Product Type	Reference Set	Ø Sphere (DK)	30.0 mm
Length (L)	514.0 mm	Material	Stainl. St.
Stylus Tip Mate...	Ceramic	Application	Tactile



Hook clamp

600062-0210-056


Product Type	Clamps	Length (L)	200.0 mm
Application	Secure		



Reference Sphere DK 30, DG 18, M6 (Matt finish)

600332-8466-000

Product Type	Reference Sphere	Ø Sphere (DK)	30.0 mm
Length (L)	85.0 mm	Stylus Tip Mate...	Tung. Carb.
Application	Optical		



OMEGA 322 grid pallet, M4 25x25, without cut-out

626109-9510-033

Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	25 mm x 25 mm



OmniFix Vise, 170 x 520

626109-9220-290

Product Type	Vise	Material	Stainl. St.
Application	Secure		



Bar adapter plate, 60 mm

600062-0347-001

Product Type	Adapter	Length (L)	90.0 mm
Material	Aluminum	Application	Connect
Width (B)	59.0		



Adapter plate, 80 mm, KM6

600062-0000-675

Ø Sphere (DK)	80.0 mm	Length (L)	110.0 mm
---------------	---------	------------	----------



OMEGA 543 grid pallet, M4 15x15

626109-9512-032

Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	15 mm x 15 mm



Extension cable 0.5m

626140-9145-005

Product Type	Cable	Application	Connect
--------------	-------	-------------	---------



OMEGA 543 blank pallet

626109-9512-030

Product Type	Blank Pallet	Material	Aluminum
Application	Secure	Grid	Ohne



Multi Sensor Rack (MSR) 5+1 fold for ZEISS O-INSPECT 322

626100-9382-021

Product Type	Sensor Rack	Material	Stainl. St.
Application	Store	Measuring Area X	300



Adapter pallet OMEGA 543 to 322 with TSI, comfort

626109-9512-006

Product Type	Calibration Pallet	Material	Aluminum
Application	Calibrate	Grid	Ohne



Temperature sensor (mini), straight, open cable end

626140-9113-200

Product Type	Temperature Se...	Application	Thermal
--------------	-------------------	-------------	---------



Toggle clamp M6

600062-0210-053

Product Type	Toggle Clamp	Material	Steel
Application	Secure		



OMEGA 322 frame pallet, glass

626109-9510-020


Product Type	Frame Pallet	Material	Clear Glass
Application	Secure	Grid	Ohne



Quick change unit V1, lower part, 80 mm

600062-0000-146

Ø Sphere (DK)	67.0 mm	Length (L)	80.0 mm
---------------	---------	------------	---------



CMG Set MMZT, 2100 X 4400 mm, 8 plates, M6,
50mm grid
600062-0210-308

Product Type	Grid Pallet	Application	Secure
Machine	MMZ	Grid	50 mm x 50 mm



Quick change unit V3, lower part, 80 mm, for
extruded profile
600062-0205-018

Ø Sphere (DK)	20.0 mm	Length (L)	80.0 mm
---------------	---------	------------	---------



Quick change unit V3, upper part, 80 mm
600062-0205-016

Ø Sphere (DK)	20.0 mm	Length (L)	80.0 mm
---------------	---------	------------	---------



CMM Check1.0 DuraMax, calibrated (Software not included)

626106-9355-509

Product Type	Artifacts	Application	Check
--------------	-----------	-------------	-------



Hydr. lifting unit, lift height 100 mm, for extruded profiles

600062-0000-857


Ø Sphere (DK)	100.0 mm	Length (L)	100.0 mm
---------------	----------	------------	----------



Toggle clamp M4

600062-0210-054

Product Type	Toggle Clamp	Material	Steel
Application	Secure		



CMM-Check 2.0 Software license with USB dongle

626106-9351-300

Product Type	Software	Application	Check
--------------	----------	-------------	-------



THETA 32 base plate, M10

626109-9220-010


Product Type	Blank Pallet	Material	Aluminum
Application	Secure	Grid	Ohne



Part Support D20 M12x1 - Spherical Support - adjustable

600062-0210-086

Product Type	Edition	Material	Stainl. St.
Application	Mount		



Multi Sensor Rack (MSR) X=1600, for MMZ

626100-9342-010

Product Type	Sensor Rack	Material	Aluminum
Application	Store	Measuring Area X	1600



Reference sphere holder, for O-INSPECT M6 base
(reference sphere not included)

600332-9485-000

Product Type	Reference Sph...	Length (L)	105.0 mm
Material	Stainl. St.	Application	Tactile
Machine	O-INSPECT		



Temperature sensor (mini) straight, M5

626140-9141-010

Product Type	Temperature Se...	Application	Thermal
--------------	-------------------	-------------	---------



Measuring wire specimen set for METROTOM 1500

626106-9200-000


Product Type	Wire Artifact	Application	Tomographic
Machine	METROTOM 1500		



OmniFix® Kit – M6, 500x500mm

600062-0351-006

Product Type	Kit	Application	Secure
--------------	-----	-------------	--------



OmniFix Vise, 80 x 160

626109-9220-210

Product Type	Vise	Material	Stainl. St.
Application	Secure		



O-INSPECT 322 Rail for calibration standard

626109-9510-100

Product Type	Mounting Strip	Material	Stainl. St.
Application	Secure	Grid	Blank



Elastic Pressure Spindle M8x60

600062-0210-057

Product Type	Pressure Spindle	Length (L)	60.0 mm
Material	Steel	Application	Extend



Sensor Rack micro VAST XXT

626100-9382-010

Product Type	Sensor Rack	Material	Stainl. St.
Application	Store		



Reference Sphere DK 30, DG 18, M6

600332-8446-000

Product Type	Reference Sphere	Ø Sphere (DK)	30.0 mm
Length (L)	85.0 mm	Stylus Tip Mate...	Ceramic
Application	Tactile		



Storage bar for MSR 2.0 X=900

626100-9300-003


Product Type	Sensor Rack	Length (L)	990.0 mm
Material	Aluminum	Application	Store
Measuring Area X	900		



Part Support D10 M8x0,5 - Prism D14 narrow

600062-0215-029

Product Type	Edition	Material	Stainl. St.
Application	Mount		



OMEGA SELECT pallet, blank

626109-9514-010

Product Type	Blank Pallet	Material	Acrylic
Application	Secure	Grid	Ohne



Diffuser HD for ZEISS O-INSPECT

626109-9517-002

Measuring Sensor	O-INSPECT	Product Type	Diffusor
Application	Optical		



Extruded profile, 50x50 mm, L=1000 mm

600062-0210-451

Ø Sphere (DK)	50.0 mm	Length (L)	1000.0 mm
---------------	---------	------------	-----------



RST-T exchange sensor

600661-8600-000

Measuring Sensor	RST-T	Product Type	Temperature Se...
Application	Thermal		



Additional level MSR X=500

626100-9353-000

Product Type	Level	Length (L)	600.0 mm
Material	Aluminum	Application	Store
Measuring Area X	500		




NO IMAGE AVAILABLE

Adapter plate cross, 50 on 50 mm

600062-0210-402

Ø Sphere (DK)	100.0 mm	Length (L)	100.0 mm
---------------	----------	------------	----------



THETA 55 base plate, M10

626109-9220-510

Product Type	Base Plate	Material	Aluminum
Application	Secure	Grid	Ohne



OMEGA 543 grid pallet, M4 25x25

626109-9512-031


Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	25 mm x 25 mm



OmniFix Three-jaw ring chucks for rotary table applications Ø125 mm

000000-0642-568

Product Type	3 Jaw Chuck	Material	Steel
Application	Mount		

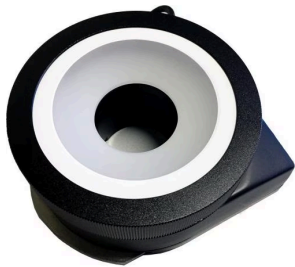

Ring light (diffuse) for O-DETECT

600784-9002-100



ProMax for ZEISS O-INSPECT 322

626100-9700-000


Product Type	ProMax	Material	Stainl. St.
Application	Store		



CMG PRISMO, 700 X 900 mm, 1 plate, M6, 50mm grid

600062-0210-299

Product Type	Grid Pallet	Length (L)	800.0 mm
Material	Aluminum	Application	Secure
Width (B)	700.0	Weight	46400.0 g
Grid	50 mm x 50 mm		



THETA 32/55 base plate, M12

626161-0003-700


Product Type	Base Plate	Material	Aluminum
Application	Secure	Grid	Ohne



Extension cable 0.25m

626140-9145-003

Product Type	Cable	Application	Connect
--------------	-------	-------------	---------



Probe socket for RDS

621770-8040-000

Measuring Sensor	RDS	Product Type	Probe Sockets
Application	Store		



Three jaw chuck kit for DuraMax rotary table

626109-9232-000

Product Type	Set	Application	Secure
--------------	-----	-------------	--------



Part Fastening D10 M6 - Pliers Clamp

600062-0215-015

Product Type	Mount	Length (L)	50.0 mm
Material	Stainl. St.	Connection Type	D10
Application	Secure		



OmniFix® Kit – Profile, 1800x600mm

600062-0001-260


Product Type	Kit	Application	Secure
--------------	-----	-------------	--------



OMEGA 543 frame pallet, glass with temperature interface

626109-9512-025

Product Type	Frame Pallet	Material	Clear Glass
Application	Secure	Grid	Ohne



THETA 55 base plate, M12

626109-9220-512


Product Type	Base Plate	Material	Aluminum
Application	Secure	Grid	Ohne



Extension for Modbus temperature interface

626140-9144-034

Product Type	Cable	Application	Connect
--------------	-------	-------------	---------



Adapter plate head 60mm, for 2D- and 3D element

600062-0210-407


Ø Sphere (DK)	60.0 mm	Length (L)	60.0 mm
---------------	---------	------------	---------



Room temperature sensor Smart Services Dashboard

626140-9141-080

Product Type	Temperature Se...	Application	Thermal
--------------	-------------------	-------------	---------



Probe socket for VAST XXT (3)

620161-8510-000

Measuring Sensor	VAST XXT	Product Type	Probe Sockets
Application	Store		



OMEGA 543 adjustable frame pallet, glass with temperature interface

626109-9512-015

Product Type	Frame Pallet	Material	Clear Glass
Application	Secure	Grid	Ohne



Storage bar for MSR 2.0 X=1000

626100-9300-004

Product Type	Sensor Rack	Length (L)	1090.0 mm
Material	Aluminum	Application	Store
Measuring Area X	1000		



Toggle clamp M5, L = 100 mm

600062-0341-001

Product Type	Toggle Clamp	Length (L)	100.0 mm
Material	Steel	Application	Secure



OMEGA 543 frame pallet, spare acrylic insert

626109-8512-012

Product Type	Glass Insert	Material	Acrylic
Application	Optical	Grid	Ohne



OMEGA 543 adjustable frame pallet, glass

626109-9512-010

Product Type	Frame Pallet	Material	Clear Glass
Application	Secure	Grid	Ohne



Jointed Arm Unit D50 with magnetic Footplate D120

600062-0326-001

Product Type	Basic Unit	Length (L)	500.0 mm
Material	Aluminum	Application	Mount



Temperature sensor (mini), angled, DIN

626140-9113-010



Multi Sensor Rack Telescopic (MSR-T) Y=1280, for CenterMax, w/o Probe Socket

626100-9305-100

Product Type	Sensor Rack	Material	Aluminum
Application	Store		



Reference sphere holder, Thermofit, 200 mm, M8 base (reference sphere not included)

626106-9010-000

Product Type	Reference Sph...	Length (L)	200.0 mm
Material	ThermoFit	Application	Tactile



CMG grid plate 400×600×20

600062-0114-000

Product Type	Grid Pallet	Length (L)	400.0 mm
Material	Aluminum	Application	Secure
Width (B)	600.0	Weight	12220.0 g
Grid	50 mm x 50 mm		



Storage bar for MSR 2.0 X=500

626100-9300-001

Product Type	Sensor Rack	Length (L)	590.0 mm
Material	Aluminum	Application	Store
Measuring Area X	500		



Jointed Arm Unit D50 with Profile Adapterplate 60

600062-0327-001

Product Type	Knuckle Joint	Length (L)	500.0 mm
Material	Aluminum	Application	Mount



CMG grid plate 250×250×20

600062-0112-000

Product Type	Grid Pallet	Length (L)	250.0 mm
Material	Aluminum	Application	Secure
Width (B)	250.0	Weight	3146.0 g
Grid	50 mm x 50 mm		



Column D10 M4 MF - L15

600062-0215-022

Product Type	Column	Length (L)	15.0 mm
Material	Stainl. St.	Application	Extend



NO IMAGE AVAILABLE

Column support, universal, height 150 mm

600062-0000-344

Length (L) 150.0 mm



Quick change unit V1, upper part, 60 mm, KM6, round bolt

600062-0000-130

Ø Sphere (DK) 67.0 mm Length (L) 80.0 mm




NO IMAGE AVAILABLE

CMG Set ACCURA 2, 900 X 1600 mm, 2 plates, M6, 50mm grid

600062-0210-288

Product Type	Grid Pallet	Length (L)	1400.0 mm
Material	Aluminum	Application	Secure
Width (B)	900.0	Weight	104100.0 g
Machine	ACCURA	Grid	50 mm x 50 mm



THETA 32 pallet, M6 25x25 grid, Nickel-plated steel

626109-9220-020

Product Type	Grid Pallet	Material	Steel
Application	Secure	Grid	25 mm x 25 mm



Additional level for MSR X=1600

626100-9343-000

Product Type	Level	Length (L)	1600.0 mm
Material	Aluminum	Application	Store
Measuring Area X	1600		



Multi Sensor Rack (MSR) Y=1280, for CenterMax, Bottom

000000-1038-094


Product Type	Sensor Rack	Material	Aluminum
Application	Store		



Reference sphere holder, 187 mm, Magnetic base (reference sphere not included)

600332-9169-000


Product Type	Reference Sph...	Length (L)	187.0 mm
Material	Stainl. St.	Application	Tactile



CMG Set Spectrum, 1000 X 1600 mm, 2 plates,
M6, 50mm grid

600062-0210-314

Product Type	Grid Pallet	Application	Secure
Machine	SPECTRUM	Grid	50 mm x 50 mm



THETA 55 pallet, blank

626109-9220-550

Product Type	Blank Pallet	Material	Aluminum
Application	Secure	Grid	Ohne



Reference Sphere DK 25, DG 18, M8

626106-0055-000

Product Type	Reference Sphere	Ø Sphere (DK)	25.0 mm
Length (L)	56.0 mm	Stylus Tip Mate...	Ceramic
Application	Tactile		



OMEGA 543 comfort grid pallet, M4 25x25

626109-9512-041

Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	25 mm x 25 mm



OMEGA 322 grid pallet, M4 15x15

626109-9510-032

Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	15 mm x 15 mm



Sensor Check Box

626140-9144-020

Product Type	Temperature Se...	Application	Thermal
--------------	-------------------	-------------	---------



OmniFix Three-jaw chuck DIN 6350 for rotary table applications Ø200 mm

000000-0642-566


Product Type	3 Jaw Chuck	Material	Steel
Application	Mount		



CMG CONTURA, 700 X 700 mm, 1 plate, M6, 50mm grid

600062-0210-279

Product Type	Grid Pallet	Length (L)	700.0 mm
Material	Aluminum	Application	Secure
Width (B)	700.0	Weight	33800.0 g
Grid	50 mm x 50 mm		



Gear Check, GEAR® PRO involute, calibrated

626119-0001-026

Product Type	Artifacts	Application	Check
--------------	-----------	-------------	-------



Ring light (standard) for O-DETECT

600784-9002-000



Adapter plate 60mm, for 2D- and 3D element

600062-0210-424

Ø Sphere (DK)	60.0 mm	Length (L)	100.0 mm
---------------	---------	------------	----------



Probe socket VAST XTR

600664-8600-000

Measuring Sensor	VAST XTR	Product Type	Probe Sockets
Application	Store		



OmniFix® Kit – M4, 240x240mm

600062-0351-027


Product Type	Kit	Application	Secure
--------------	-----	-------------	--------



CMG MICURA, 500 X 500 mm, 1 plate, M6, 50mm grid

600062-0210-298

Product Type	Grid Pallet	Length (L)	350.0 mm
Material	Aluminum	Application	Secure
Width (B)	500.0	Weight	9400.0 g
Grid	50 mm x 50 mm		



Calibration template for RT-axis and styli kit for O-INSPECT

626106-0059-000


Product Type	Reference Set	Application	Tactile
--------------	---------------	-------------	---------



Extension cable 1m

626140-9145-010

Product Type	Cable	Application	Connect
--------------	-------	-------------	---------



CMG Set ACCURA 2, 1200 X 2400 mm, 2 plates,
M6, 50mm grid

600062-0210-289

Product Type	Grid Pallet	Length (L)	2400.0 mm
Material	Aluminum	Application	Secure
Width (B)	1200.0	Weight	215600.0 g
Grid	50 mm x 50 mm		



OMEGA 543 blank pallet with temperature
interface

626109-9512-035

Product Type	Blank Pallet	Material	Aluminum
Application	Secure	Grid	Ohne



OMEGA 543 frame pallet, acrylic

626109-9512-022

Product Type	Frame Pallet	Material	Acrylic
Application	Secure	Grid	Ohne



Hydr. lifting unit, lift height 29 mm, for extruded profiles

600062-0000-323

Ø Sphere (DK)	100.0 mm	Length (L)	29.0 mm
---------------	----------	------------	---------



Double Reference sphere holder, Invar, 300mm, M8/M12 base (reference sphere not included)

626106-9130-100


Product Type	Reference Sph...	Length (L)	300.0 mm
Material	Invar	Application	Tactile



Measuring set Roughness

626106-9390-000

Product Type	Reference Set	Application	Tactile
--------------	---------------	-------------	---------



CMG Set PRISMO, 1200 X 2400 mm, 2 plates,
M6, 50mm grid

600062-0210-304

Product Type	Grid Pallet	Length (L)	2200.0 mm
Material	Aluminum	Application	Secure
Width (B)	1200.0	Weight	215600.0 g
Grid	50 mm x 50 mm		



THETA RT vise kit for DuraMax

626109-9220-410

Product Type	Set	Application	Secure
--------------	-----	-------------	--------



OMEGA 863 pallet holding system

626109-9515-007

Product Type	Base Plate	Material	Steel
Application	Secure	Grid	Ohne



CMG CONTURA, 1000 X 1200 mm, 1 plate, M6,
50mm grid

600062-0210-283

Product Type	Grid Pallet	Length (L)	1200.0 mm
Material	Aluminum	Application	Secure
Width (B)	1000.0	Weight	98200.0 g
Grid	50 mm x 50 mm		



OMEGA 322 frame pallet, acrylic

626109-9510-022

Product Type	Frame Pallet	Material	Acrylic
Application	Secure	Grid	Ohne



Multi Sensor Rack (MSR) 3-fold for ZEISS O-INSPECT 322

626100-9382-020

Product Type	Sensor Rack	Material	Stainl. St.
Application	Store	Measuring Area X	150



Probe head storage

000000-1028-812

Measuring Sensor	VAST/MT	Product Type	Probe Head Sto...
Application	Store		



Straight pin 30 mm

600062-0210-025

Product Type	Straight Pin	Length (L)	30.0 mm
Material	Steel	Application	Secure



CMG grid plate 700×800×25

600062-0116-000

Product Type	Grid Pallet	Length (L)	700.0 mm
Material	Aluminum	Application	Secure
Width (B)	800.0	Weight	45000.0 g
Grid	50 mm x 50 mm		



T-nut M6

600062-0000-161



Single temperature interface

626140-9144-035

Product Type	Temperature Se...	Application	Thermal
--------------	-------------------	-------------	---------



OMEGA 322 frame pallet, frosted
626109-9510-021

Product Type	Grid Pallet	Material	Matt Glass
Application	Secure	Grid	Ohne



Double Reference sphere holder, Thermofit,
200mm, M8 base (reference spheres not included)
626106-9110-000

Product Type	Reference Sph...	Length (L)	200.0 mm
Material	ThermoFit	Application	Tactile



Reference Sphere DK 25, DG 12, M6

626106-0060-000

Product Type	Reference Sphere	Ø Sphere (DK)	25.0 mm
Length (L)	55.0 mm	Stylus Tip Mate...	Ceramic
Application	Tactile		



Reference sphere holder, Invar, 300mm, M8/M12 base (reference sphere not included)

626106-9030-100

Product Type	Reference Sph...	Length (L)	300.0 mm
Material	Invar	Application	Tactile



NO IMAGE AVAILABLE

Omnifix gripper starter set, size 50, 13-piece

626170-0011-128

Product Type	Set	Material	Aluminum
Application	Mount		



NO IMAGE AVAILABLE

CMG Set CONTURA, 1200 X 1800 mm, 2 plates, M6, 50mm grid

600062-0210-285

Product Type	Grid Pallet	Length (L)	1800.0 mm
Material	Aluminum	Application	Secure
Width (B)	1200.0	Weight	157400.0 g
Machine	CONTURA	Grid	50 mm x 50 mm



CMG PRISMO, 900 X 1300 mm, 1 plate, M6, 50mm grid

600062-0210-302

Product Type	Grid Pallet	Length (L)	1200.0 mm
Material	Aluminum	Application	Secure
Width (B)	900.0	Weight	88500.0 g
Grid	50 mm x 50 mm		



Lower lifting unit, type 330, L = 330 mm, anodized,
PTFE-coated

600062-0329-001

Product Type	Spacer	Length (L)	330.0 mm
Material	Aluminum	Application	Adjust



Quick change unit V1, upper part, 80 mm, KM6,
round bolt

600062-0000-126

Ø Sphere (DK)	67.0 mm	Length (L)	80.0 mm
---------------	---------	------------	---------



OmniFix® Kit lite – M4, 240x240mm

600062-0351-026

Product Type	Kit	Application	Secure
--------------	-----	-------------	--------



Prism 120° small

600062-0210-052

Product Type

V-Block

Application

Mount



R+K Diamond nut M8

600062-0100-024



NO IMAGE AVAILABLE

R+K T-nut M6

600062-0100-022



NO IMAGE AVAILABLE

R+K T-nut M8 flat


600062-0100-021



OMEGA 543 calibration pallet

626109-9512-000

Product Type	Calibration Pallet	Material	Aluminum
Application	Calibrate	Grid	Ohne



OMEGA 442 frame pallet, Plexiglass

626109-9520-022

Product Type	Frame Pallet	Material	Plexi Glass
Application	Secure	Grid	Ohne



SPC folding element, centered

600062-0000-742

Product Type	Knuckle Joint	Length (L)	147.5 mm
Material	Aluminum	Application	Mount



OmniFix Vise, 120 x 370

626109-9220-260

Product Type	Vise	Material	Stainl. St.
Application	Secure		



CMG PRISMO, 900 X 1200 mm, 1 plate, M6,
50mm grid

600062-0210-301


Product Type	Grid Pallet	Length (L)	1100.0 mm
Material	Aluminum	Application	Secure
Width (B)	900.0	Weight	81200.0 g
Grid	50 mm x 50 mm		



Reference Sphere DK 25, DG 12, M8

626106-0048-000

Product Type	Reference Sphere	Ø Sphere (DK)	25.0 mm
Length (L)	55.0 mm	Stylus Tip Mate...	Ceramic
Application	Tactile		



CMG Set CONTURA, 900 X 1600 mm, 2 plates,
M6, 50mm grid

600062-0210-282


Product Type	Grid Pallet	Length (L)	1600.0 mm
Material	Aluminum	Application	Secure
Width (B)	900.0	Weight	104100.0 g
Grid	50 mm x 50 mm		



OmniFix® Kit lite – M6, 500x500mm

600062-0351-005

Product Type	Kit	Connection Type	D20
Application	Secure		



Complete reference sphere kit, DK 25, 214 mm, M10 base

600332-9258-000

Product Type	Reference Set	Ø Sphere (DK)	25.0 mm
Length (L)	214.0 mm	Material	Stainl. St.
Stylus Tip Mate...	Ceramic	Application	Tactile
Machine			
DuraMax			



Linear slide, 80 mm, adjustable

600062-0000-422

Ø Sphere (DK)	25.0 mm	Length (L)	80.0 mm
---------------	---------	------------	---------



Temperature sensor in steel housing, open cable end

626140-9112-200



Toggle clamp M5, L = 140 mm

600062-0342-001


Product Type	Toggle Clamp	Length (L)	140.0 mm
Material	Steel	Application	Secure



Package closed spacer plate 10x30 ETV

600062-0210-542

Ø Sphere (DK)	10.0 mm	Length (L)	30.0 mm
---------------	---------	------------	---------



CMG Set CONTURA, 1000 X 1600 mm, 2 plates,
M6, 50mm grid

600062-0210-284

Product Type	Grid Pallet	Length (L)	1600.0 mm
Material	Aluminum	Application	Secure
Width (B)	1000.0	Weight	131500.0 g
Grid	50 mm x 50 mm		



Reference Sphere DK 25, DG 24, M8

626106-0041-000


Product Type	Reference Sphere	Ø Sphere (DK)	25.0 mm
Length (L)	140.0 mm	Stylus Tip Mate...	Ceramic
Application	Tactile		



Quick change unit V3, upper part, 60 mm

600062-0205-013


Product Type	Mount	Ø Sphere (DK)	20.0 mm
Length (L)	60.0 mm	Material	Aluminum

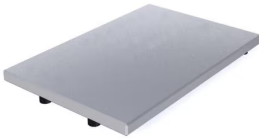

THETA 32 pallet, blank, Nickel-plated steel

626109-9220-050

Product Type	Blank Pallet	Material	Steel
Application	Secure	Grid	Ohne

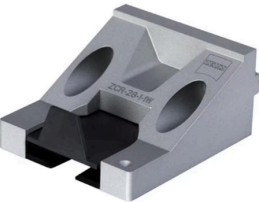

Probe socket for VAST XXT (1)

620161-8511-000

Measuring Sensor	VAST XXT	Product Type	Probe Sockets
Application	Store		



Part Support D10 M8x0,5 - Prism D10 narrow


600062-0215-028

Product Type	Edition	Material	Stainl. St.
Application	Mount		



R+K Diamond nut M6


600062-0100-023



CMG Set PRISMO, 1200 X 1800 mm, 2 plates,
M6, 50mm grid

600062-0210-303


Product Type	Grid Pallet	Length (L)	1600.0 mm
Material	Aluminum	Application	Secure
Width (B)	1200.0	Weight	157400.0 g
Grid	50 mm x 50 mm		



Package open spacer plate 60x60 ETV

600062-0210-498

Ø Sphere (DK)	60.0 mm	Length (L)	60.0 mm
---------------	---------	------------	---------



Jaw chuck pallet DuraMax

626109-9210-040

Product Type	Blank Pallet	Material	Aluminum
Application	Secure		



Reference Sphere DK 30, DG 18, M6 (Matt finish)
(Higher accuracy sphere)

600332-8476-000

Product Type	Reference Sphere	Ø Sphere (DK)	30.0 mm
Length (L)	85.0 mm	Stylus Tip Mate...	Ceramic
Application	Optical		



Thread Adapter M6 - M8x0,5

600062-0215-020

Product Type	Adapter	Length (L)	18.0 mm
Material	Stainl. St.	Application	Connect



Temperature sensor (mini), straight, SUB-D

626140-9113-100



Double Reference sphere holder, Invar, 200mm, M8/M12 base (reference sphere not included)

626106-9120-100

Product Type	Reference Sph...	Length (L)	200.0 mm
Material	Invar	Application	Tactile



Linear slide, 120 mm, spring assembly

600062-0000-423

Ø Sphere (DK)	30.0 mm	Length (L)	120.0 mm
---------------	---------	------------	----------



THETA 55 M12 base and blank pallet Set

626109-9220-652

Product Type	Pallet Set	Material	Aluminum
Application	Secure	Grid	Ohne



O-SELECT Check, calibrated

636523-0220-100

Product Type	Artifacts	Application	Check
--------------	-----------	-------------	-------



Connecting Elements D20 M6 - Hinge L50

600062-0210-088

Product Type	Connect	Material	Stainl. St.
Application	Adjust		



NO IMAGE AVAILABLE

CMG CONTURA, 700 X 1000 mm, 1 plate, M6, 50mm grid

600062-0210-280

Product Type	Grid Pallet	Length (L)	1000.0 mm
Material	Aluminum	Application	Secure
Width (B)	700.0	Weight	57700.0 g
Machine	CONTURA	Grid	50 mm x 50 mm



OmniFix Vise, 170 x 420

626109-9220-280

Product Type	Vise	Material	Stainl. St.
Application	Secure		



Upper lifting unit, L = 150 mm, anodized, PTFE-coated

600062-0332-001

Product Type	Spacer	Length (L)	150.0 mm
--------------	--------	------------	----------

Material	Aluminum	Application	Adjust
----------	----------	-------------	--------



Part Support D10 M8x0,5 - Prism D10

600062-0215-007

Product Type	Edition	Material	Stainl. St.
Application	Mount		



Part Support D10 M8x0,5 - Cone Support

600062-0215-008

Product Type	Edition	Material	Stainl. St.
Application	Mount		



Connecting cable for temperature interface, pallet-side for fixtures

626140-9134-120



NO IMAGE AVAILABLE

Pallet for pallet feed Duplex, without bore grid

602703-9000-101

Product Type	Pallet System	Application	Prepare
Machine	DuraMax		



OMEGA 322 adjustable frame pallet, acrylic

626109-9510-012

Product Type	Frame Pallet	Material	Acrylic
Application	Secure	Grid	Ohne



Additional level for MSR X=700

626100-9303-000

Product Type	Level	Length (L)	800.0 mm
Material	Aluminum	Application	Store
Measuring Area X	700		



Reference sphere holder, 364 mm, M12 base
(reference sphere not included)

600332-9166-000

Product Type	Reference Sph...	Length (L)	364.0 mm
Material	Stainl. St.	Application	Tactile



Jointed arm for temperature sensor mini, M6


626140-9134-001



OMEGA 442 frame pallet, glass

626109-9520-020

Product Type	Frame Pallet	Material	Clear Glass
Application	Secure	Grid	Ohne



THETA 32 pallet, M6 25x25 grid, Aluminum
626109-9220-021

Product Type	Grid Pallet	Material	Steel
Application	Secure	Grid	25 mm x 25 mm



Package open spacer plate 80x80 ETV
600062-0210-497

Ø Sphere (DK)	80.0 mm	Length (L)	80.0 mm
---------------	---------	------------	---------



OmniFix® Kit – jointed arm, 1000x1000mm
600062-0001-248


Product Type	Kit	Application	Secure
--------------	-----	-------------	--------



CMG grid plate 500×400×20

600062-0111-000

Product Type	Grid Pallet	Length (L)	500.0 mm
Material	Aluminum	Application	Secure
Width (B)	400.0	Weight	10360.0 g
Grid	50 mm x 50 mm		



CMG Set PRISMO, 1200 X 3000 mm, 3 plates, M6, 50mm grid

600062-0210-305

Product Type	Grid Pallet	Length (L)	2800.0 mm
Material	Aluminum	Application	Secure
Width (B)	1200.0	Weight	274900.0 g
Grid	50 mm x 50 mm		



Jointed Arm Unit D25 with Gridplate 50 - long

600062-0000-229

Product Type	Basic Unit	Length (L)	330.0 mm
--------------	------------	------------	----------


Application Mount



OmniFix Vise, 120 x 320

626109-9220-250

Product Type	Vise	Material	Aluminum
Application	Secure		



THETA 55 pallet, 1/4-20 and 1/2x1/2 grid, Aluminum

626109-9220-530


Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	1/2 x 1/2



Additional level for MSR X=1200

626100-9333-000

Product Type	Level	Length (L)	1250.0 mm
Material	Aluminum	Application	Store





Diamond nut M6

600062-0000-162



Locating unit, L = 150 mm

600062-0334-001


Product Type	Position	Length (L)	150.0 mm
Material	Aluminum	Application	Adjust



Extruded profile, 50x50 mm, L=1500 mm

600062-0210-461

Ø Sphere (DK)	50.0 mm	Length (L)	1500.0 mm
---------------	---------	------------	-----------



THETA 32 with chuck

626109-9220-040

Product Type	Interchangeabl...	Material	Aluminum
Application	Secure	Grid	Ohne



Complete reference sphere kit, DK 30, 187 mm,
(Matt finish) Magnetic base

600332-9269-000

Product Type	Reference Set	Ø Sphere (DK)	30.0 mm
Length (L)	187.0 mm	Material	Stainl. St.
Stylus Tip Mate...	Tung. Carb.	Application	Optical



OMEGA 322 grid pallet, M4 25x25

626109-9510-031

Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	25 mm x 25 mm



Loading (MAN) - Duplex system

626140-9123-500


Product Type Pallet System



Underfloor hookclamp spreadable D25

600062-0000-530


Ø Sphere (DK) 63.0 mm Length (L) 250.0 mm



Probe socket RDS CFS

621770-8050-000

Measuring Sensor RDS Product Type Probe Sockets
Application Store



CMG Set ACCURA 2, 1200 X 3000 mm, 3 plates,
M6, 50mm grid

600062-0210-290

Product Type	Grid Pallet	Length (L)	3000.0 mm
Material	Aluminum	Application	Secure
Width (B)	1200.0	Weight	274900.0 g
Grid	50 mm x 50 mm		



Adapter Column D20 M12x1 - D8 MF - adjustable

600062-0210-089

Product Type	Column	Material	Stainl. St.
Application	Connect		



Multi Sensor Rack (MSR) X=1600, for Bridge
CMM

626100-8342-000

Product Type	Sensor Rack	Material	Aluminum
Application	Store	Measuring Area X	1600



OMEGA 543 frame pallet, glass

626109-9512-020


Product Type	Frame Pallet	Material	Clear Glass
Application	Secure	Grid	Ohne



Toggle clamp riser, L = 155 mm

600062-0345-001


Product Type	Position	Length (L)	155.0 mm
Material	Aluminum	Application	Secure



Cover plate for DuraMax table

626109-9210-010


Product Type	Cover Plate	Material	Stainl. St.
--------------	-------------	----------	-------------



Package closed spacer plate 60x60 ETV

600062-0210-541

Ø Sphere (DK)	60.0 mm	Length (L)	60.0 mm
---------------	---------	------------	---------



CMG Set ACCURA 2, 1600 X 3000 mm, 6 plates,
M6, 50mm grid

600062-0210-293

Product Type	Grid Pallet	Length (L)	3000.0 mm
Material	Aluminum	Application	Secure
Width (B)	1600.0	Weight	368500.0 g
Grid	50 mm x 50 mm		



CMG PRISMO, 700 X 900 mm, 1 plate, M6, 50mm
grid

600062-0210-311

Product Type	Grid Pallet	Application	Secure
Machine	PRISMO	Grid	50 mm x 50 mm



Column D10 M4 MF - L22,5

600062-0215-023

Product Type	Column	Length (L)	22.5 mm
Material	Stainl. St.	Application	Extend



Thread Adapter M4 - M8x0,5

600062-0215-019

Product Type	Adapter	Length (L)	17.0 mm
Material	Stainl. St.	Application	Connect



CMG PRISMO, 700 X 1000 mm, 1 plate, M6,
50mm grid

600062-0210-300

Product Type	Grid Pallet	Length (L)	800.0 mm
Material	Aluminum	Application	Secure
Width (B)	700.0	Weight	46400.0 g
Grid	50 mm x 50 mm		



MSP temperature interface

626140-9144-032


Product Type	Interface	Application	Connect
--------------	-----------	-------------	---------



Part Fastening D10 M6 - Parallel Clamp

600062-0215-016

Product Type	Mount	Length (L)	50.0 mm
Material	Stainl. St.	Application	Secure



THETA 55 pallet, M6 50x50 grid, Aluminum

626109-9220-520

Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	50 mm x 50 mm



Adapter Column D20 M6 - M12x1 MF - L60 - Bottom Part

600062-0210-084

Product Type	Column	Length (L)	60.0 mm
Material	Stainl. St.	Application	Connect



Upper lifting unit, L = 280 mm, anodized, PTFE-coated

600062-0333-001

Product Type	Spacer	Length (L)	280.0 mm
Material	Aluminum	Application	Adjust



Omnifix gripper expert set, size 50, 22-piece

626170-0010-915

Product Type	Set	Material	Aluminum
Application	Mount		



Reference Sphere DK 15, DG 18, M6

600332-8444-000

Product Type	Reference Sphere	Ø Sphere (DK)	15.0 mm
Length (L)	77.5 mm	Stylus Tip Mate...	Ceramic
Application	Tactile		



Temperature interface, pallet-side

626140-9122-600



Reference triple with three rolls

632001-8070-000

Product Type	Reference Triple	Application	Tactile
--------------	------------------	-------------	---------



Additional level for MSR X=1000

626100-9323-000

Product Type	Level	Length (L)	1100.0 mm
Material	Aluminum	Application	Store
Measuring Area X	1000		



CMM Check 1.0 O-INSPECT, calibrated (Software not included)

626106-9355-508


Product Type	Artifacts	Application	Check
--------------	-----------	-------------	-------



Master screw, crowned, with thread M4

600062-0000-141

Product Type	Edition	Ø Sphere (DK)	16.0 mm
Length (L)	72.0 mm	Material	Steel
Application	Adjust		



**CMG Set CONTURA, 1200 X 2400 mm, 2 plates,
M6, 50mm grid**

600062-0210-286

Product Type	Grid Pallet	Length (L)	2400.0 mm
Material	Aluminum	Application	Secure
Width (B)	1200.0	Weight	215700.0 g
Grid	50 mm x 50 mm		



O-INSPECT 543 Rail for calibration standard

626109-9512-100


Product Type	Mounting Strip	Material	Stainl. St.
Application	Secure		



Multi Sensor Rack (MSR) Y=1280, for CenterMax,
Top

000000-1038-093

Product Type	Sensor Rack	Material	Aluminum
Application	Store		



MSR duplex X=900

626100-9314-000

Product Type	Sensor Rack D...	Material	Aluminum
Application	Store	Measuring Area X	900



Part Support D10 M8x0,5 - Corner Support

600062-0215-005

Product Type	Edition	Material	Stainl. St.
Application	Mount		



Connecting Elements D10 M4 - Angle 45°

600062-0215-018

Product Type	Connect	Length (L)	20.0 mm
Material	Stainl. St.	Application	Connect
Width (B)	12.0		



Complete reference sphere kit, DK 30, 214 mm, M10 base

600332-9268-000

Product Type	Reference Set	Ø Sphere (DK)	30.0 mm
Length (L)	214.0 mm	Material	Stainl. St.
Stylus Tip Mate...	Ceramic	Application	Tactile
Machine			
DuraMax			



OMEGA 543 RT pallet

626109-9512-039

Product Type	Blank Pallet	Material	Aluminum
Application	Secure	Grid	Ohne



Underfloor hookclamp base unit

600062-0000-529

Ø Sphere (DK)	63.0 mm	Length (L)	200.0 mm
---------------	---------	------------	----------



COMET Check, calibrated

626106-9301-000

Product Type	Artifacts	Application	Check
--------------	-----------	-------------	-------



OMEGA 322 pallet, spare glass insert

626109-8510-010


Product Type	Glass Insert	Material	Clear Glass
Application	Optical	Grid	Ohne



Part Support D10 M8x0,5 - Flat Support

600062-0215-009

Product Type	Edition	Material	Stainl. St.
Application	Mount		



THETA 32 pallet, 1/4-20 and 1/2x1/2 grid, Nickel-plated steel

626109-9220-025

Product Type	Grid Pallet	Material	Steel
Application	Secure	Grid	1/2 x 1/2



Diffuser LD for ZEISS O-INSPECT

626109-9517-001

Measuring Sensor	O-INSPECT	Product Type	Diffuser
Application	Optical		



OmniFix Vise, 120 x 220

626109-9220-230

Product Type	Vise	Material	Stainl. St.
Application	Secure		



Rotary table set

626106-9370-000

Product Type	Reference Set	Application	Tactile
--------------	---------------	-------------	---------



Toggle clamp M5, L = 180 mm

600062-0343-001

Product Type	Toggle Clamp	Length (L)	180.0 mm
Material	Steel	Application	Secure



OMEGA 322 pallet, spare frosted glass insert

626109-8510-011

Product Type	Glass Insert	Material	Matt Glass
Application	Optical	Grid	Ohne



Jointed arm for temperature sensor mini, M10

626140-9134-002



OmniFix® Kit – jointed arm, 500x400mm

600062-0001-259

Product Type	Kit	Application	Secure
--------------	-----	-------------	--------



Part Support D10 M8x0,5 - Spherical Support

600062-0215-006

Product Type	Edition	Material	Stainl. St.
Application	Mount		



OMEGA 543 adjustable frame pallet, acrylic with temperature interface

626109-9512-017

Product Type	Frame Pallet	Material	Acrylic
Application	Secure	Grid	Ohne



R+K T-nut M6 flat


000000-2373-322



Part Fastening D10 D5 - Wire Clip

600062-0215-013

Product Type	Mount	Length (L)	46.0 mm
Material	Stainl. St.	Application	Secure

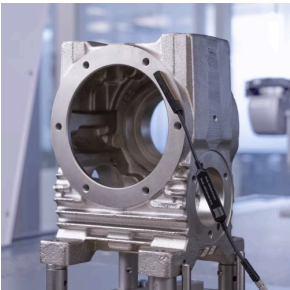

Temperature sensor (mini) magnetic, M5

626140-9141-014

Product Type	Temperature Se...	Application	Thermal
--------------	-------------------	-------------	---------



NO IMAGE AVAILABLE

Loading (MAN) - Duplex system

602703-9000-301

Product Type	Pallet System
--------------	---------------



Base plate 100

600062-0323-001

Product Type	Grid Pallet	Length (L)	135.0 mm
Material	Aluminum	Application	Secure
Width (B)	135.0	Grid	100 mm x 100 ...



Lower lifting unit, type 240, L = 240 mm, anodized, PTFE-coated

600062-0328-001

Product Type	Spacer	Length (L)	240.0 mm
Material	Aluminum	Application	Adjust



CMB Straight pin d = 8 L = 80 mm

600062-0210-028

Product Type	Straight Pin	Length (L)	80.0 mm
Material	Steel	Application	Secure



Smart Services Health Check Kit

609217-8900-903

Product Type	Artifacts
--------------	-----------



Storage bar for MSR 2.0 X=700

626100-9300-002

Product Type	Sensor Rack	Length (L)	790.0 mm
Material	Aluminum	Application	Store
Measuring Area X	700		



OMEGA SELECT frame pallet

626109-9514-000

Product Type	Frame Pallet	Material	Clear Glass
Application	Secure	Grid	Ohne



Multi-Sensor-Rack (MSR 2.0) Z800

626100-9300-800

Product Type	Sensor Rack	Material	Aluminum
Application	Store		



CMG ACCURA 2, 900 X 1200 mm, 1 plate, M6, 50mm grid

600062-0210-287

Product Type	Grid Pallet	Length (L)	1000.0 mm
Material	Aluminum	Application	Secure
Width (B)	900.0	Weight	73900.0 g
Grid	50 mm x 50 mm		



NO IMAGE AVAILABLE

50mm Elevators for OMEGA pallets

626161-0006-990

Length (L)	50.0 mm	Material	Steel
Application	Tactile		



Complete reference sphere kit, DK 25, 105 mm, M6 base

600332-9486-000

Product Type	Reference Set	Ø Sphere (DK)	25.0 mm
Length (L)	105.0 mm	Material	Stainl. St.
Stylus Tip Mate...	Ceramic	Application	Tactile
Machine			
O-INSPECT			



Column D10 M4 MF - L30

600062-0215-024

Product Type	Column	Length (L)	30.0 mm
--------------	--------	------------	---------



Omnifix gripper basic set, size 50, 16-piece

626170-0011-129


Product Type	Set	Material	Aluminum
Application	Mount		



Reference Sphere DK 45, DG 18, M6

600332-8447-000

Product Type	Reference Sphere	Ø Sphere (DK)	45.0 mm
Length (L)	92.5 mm	Stylus Tip Mate...	Ceramic
Application	Tactile		



Multi Sensor Rack (MSR) Y=1100, for GageMax

621910-8260-000

Product Type	Sensor Rack	Material	Aluminum
Application	Store		



OmniFix Vise, 120 x 270

626109-9220-240

Product Type	Vise	Material	Stainl. St.
Application	Secure		



Locating unit, L = 250 mm

600062-0336-001

Product Type	Position	Length (L)	250.0 mm
Material	Aluminum	Application	Adjust



Column D10 M6 MF - L22,5

600062-0215-026

Product Type	Column	Length (L)	22.5 mm
Material	Stainl. St.	Application	Extend



Temperature sensor (mini) clampable

626140-9141-016


Product Type	Temperature Se...	Application	Thermal
--------------	-------------------	-------------	---------



OMEGA 322 grid pallet, M6 40x40

626109-9510-036

Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	50 mm x 50 mm



CMG Set ACCURA 2, 1200 X 4200 mm, 4 plates,
M6, 50mm grid

600062-0210-291

Product Type	Grid Pallet	Length (L)	4000.0 mm
Material	Aluminum	Application	Secure
Width (B)	1200.0	Weight	392300.0 g
Grid	50 mm x 50 mm		



Quick change unit V3, lower part, 60 mm, for
extruded profile

600062-0205-015

Ø Sphere (DK)	20.0 mm	Length (L)	60.0 mm
---------------	---------	------------	---------



Distributor 4-fold, vertical

626140-9134-100



Double Reference sphere holder, Invar, 400mm,
M8/M12 base (reference sphere not included)

626106-9140-100

Product Type	Reference Sph...	Length (L)	400.0 mm
Material	Invar	Application	Tactile



CMG grid plate 400×300×20

600062-0113-000

Product Type	Grid Pallet	Length (L)	400.0 mm
Material	Aluminum	Application	Secure
Width (B)	300.0	Weight	6060.0 g
Grid	50 mm x 50 mm		



OmniFix Vise, 80 x 210

626109-9220-220


Product Type	Vise	Material	Stainl. St.
Application	Secure		



RST-T probe

600661-9675-000

Measuring Sensor	RST-T	Product Type	Probe Head
Application	Thermal		



CMG Set ACCURA 2, 1600 X 4200 mm, 8 plates, M6, 50mm grid

600062-0210-294

Product Type	Grid Pallet	Length (L)	4200.0 mm
Material	Aluminum	Application	Secure
Width (B)	1600.0	Weight	525800.0 g
Grid	50 mm x 50 mm		



Adapter cable M8 to M5

626140-9144-013

Product Type Cable



OMEGA 322 calibration pallet

626109-9510-000

Product Type	Calibration Pallet	Material	Aluminum
Application	Calibrate	Grid	Ohne



Part Fastening D10 - Column for Clip L=40

600062-0215-010

Product Type	Mount	Length (L)	40.0 mm
Material	Stainl. St.	Application	Secure



Multi-Sensor-Rack (MSR 2.0) Z600

626100-9300-600

Product Type	Sensor Rack	Material	Aluminum
Application	Store		



Linear slide, 60 mm, adjustable

600062-0000-420

Ø Sphere (DK)	25.0 mm	Length (L)	60.0 mm
---------------	---------	------------	---------



Multi Sensor Rack (MSR) X=900, for XENOS

626100-9372-000

Product Type	Sensor Rack	Material	Aluminum
Application	Store	Measuring Area X	900



Complete reference sphere kit, DK 30, 214 mm, M12 base

600332-9265-000

Product Type	Reference Set	Ø Sphere (DK)	30.0 mm
Length (L)	214.0 mm	Material	Stainl. St.
Stylus Tip Mate...	Ceramic	Application	Tactile



**CMG CONTURA, 900 X 1200 mm, 1 plate, M6,
50mm grid**

600062-0210-281

Product Type	Grid Pallet	Length (L)	1200.0 mm
Material	Aluminum	Application	Secure
Width (B)	900.0	Weight	73900.0 g
Grid	50 mm x 50 mm		



NO IMAGE AVAILABLE

Articulating element, 80 mm

600062-0000-156

Ø Sphere (DK)	50.0 mm	Length (L)	80.0 mm
---------------	---------	------------	---------



Adapter plate, 60 mm, KM6

600062-0000-668

Ø Sphere (DK)	60.0 mm	Length (L)	90.0 mm
---------------	---------	------------	---------



CMM RT Check 2.0 Standard, calibrated
(Software not included)

626106-9355-512

Product Type	Artifacts	Application	Check
--------------	-----------	-------------	-------



THETA 55 M10 base and blank pallet Set

626109-9220-650


Product Type	Pallet Set	Material	Aluminum
Application	Secure	Grid	Ohne



CMG PRISMO, 900 X 1200 mm, 1 plate, M6,
50mm grid

600062-0210-312

Product Type	Grid Pallet	Application	Secure
Machine	PRISMO	Grid	50 mm x 50 mm



THETA 55 M12 base and pallet Set, M6 50x50 grid

626109-9220-622


Product Type	Pallet Set	Material	Aluminum
Application	Secure	Grid	50 mm x 50 mm



Part Fastening D20 D8 - Spring Clip

600062-0210-077

Product Type	Mount	Application	Secure
--------------	-------	-------------	--------



CMG Set PRISMO, 1200 X 4200 mm, 4 plates,
M6, 50mm grid

600062-0210-306

Product Type	Grid Pallet	Length (L)	4000.0 mm
Material	Aluminum	Application	Secure
Width (B)	1200.0	Weight	392300.0 g
Grid	50 mm x 50 mm		



R+K T-nut M8


000000-0603-594



Reference sphere holder, Invar, 400mm, M8/M12 base (reference sphere not included)

626106-9040-100

Product Type	Reference Sph...	Length (L)	400.0 mm
Material	Invar	Application	Tactile

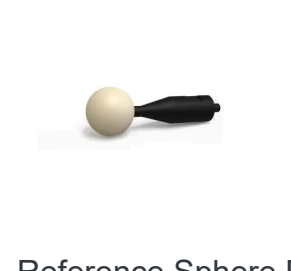

Reference Sphere DK 25, DG 18, M6 (μ50 porosity)

600332-8455-000


Product Type	Reference Sphere	Ø Sphere (DK)	25.0 mm
Length (L)	82.6 mm	Stylus Tip Mate...	Ceramic



Slotted clamp bracket, adjustable, 80 mm

600062-0338-001


Product Type	Mounting Bracket	Length (L)	80.0 mm
Material	Aluminum	Application	Secure



CMG Set ACCURA 2, 2000 X 2400 mm, 4 plates,
M6, 50mm grid

600062-0210-295

Product Type	Grid Pallet	Length (L)	2400.0 mm
Material	Aluminum	Application	Secure
Width (B)	2000.0	Weight	359900.0 g
Grid	50 mm x 50 mm		



CMK grid plate 240x240x15, Acrylic glass

600062-0215-036


Product Type	Base plate	Length (L)	240.0 mm
Material	Acrylic	Application	Secure
Width (B)	240.0	Grid	15 mm x 15 mm



OMEGA 543 adjustable frame pallet, acrylic with temperature interface

626109-9512-012


Product Type	Frame Pallet	Material	Acrylic
Application	Secure	Grid	Ohne



CMG Set MMZT, 2100 X 3200 mm, 6 plates, M6, 50mm grid

600062-0210-307


Product Type	Grid Pallet	Application	Secure
Machine	MMZ	Grid	50 mm x 50 mm



Straight pin 50 mm

600062-0210-026


Product Type	Straight Pin	Length (L)	50.0 mm
Material	Steel	Application	Secure



CMG Set ACCURA 2, 2000 X 4200 mm, 8 plates, M6, 50mm grid

600062-0210-297

Product Type	Grid Pallet	Length (L)	4200.0 mm
Material	Aluminum	Application	Secure
Width (B)	2000.0	Weight	655000.0 g
Grid	50 mm x 50 mm		



OmniFix Vise, 170 x 320

626109-9220-270

Product Type	Vise	Material	Stainl. St.
Application	Secure		



Slotted clamp bracket, adjustable, 180 mm

600062-0339-001

Product Type	Mounting Bracket	Length (L)	180.0 mm
Material	Aluminum	Application	Secure



OmniFix Vise, 120 x 270

626109-9220-245

Product Type	Vise	Material	Stainl. St.
Application	Secure		



Toggle clamp M5, L = 60 mm

600062-0340-001

Product Type	Toggle Clamp	Length (L)	60.0 mm
Material	Steel	Application	Secure



Column D10 M6 MF - L15

600062-0215-025

Product Type	Column	Length (L)	15.0 mm
Material	Stainl. St.	Application	Extend



CMM Check 2.0 Standard, calibrated (Software not included)

626106-9355-510

Product Type	Artifacts	Application	Check
--------------	-----------	-------------	-------



Measruring sphere spindle, D20 (mount D12.5/M6)

600062-0000-138

Product Type	Reference Sphere	Ø Sphere (DK)	20.0 mm
Length (L)	64.0 mm	Material	Steel
Application	Tactile		



OmniFix Tailstock jaws 120 mm

626109-9220-235

Product Type	Vise	Application	Tactile
--------------	------	-------------	---------



Additional level for MSR X=900

626100-9313-000

Product Type	Level	Length (L)	1000.0 mm
Material	Aluminum	Application	Store
Measuring Area X	900		



Locating unit, L = 200 mm

600062-0335-001

Product Type	Base plate	Length (L)	200.0 mm
Material	Aluminum	Application	Adjust



OMEGA 543 grid pallet, M4 25x25 with temperature interface

626109-9512-036

Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	25 mm x 25 mm



Adapter Column D20 M6 - D8 MF - L30

600062-0210-087

Product Type	Column	Length (L)	30.0 mm
Material	Stainl. St.	Application	Connect



Extruded profile, 50x50 mm, L=500 mm

600062-0210-441


Ø Sphere (DK)	50.0 mm	Length (L)	500.0 mm
---------------	---------	------------	----------



Jointed Arm Unit D25 with Gridplate 50 - short

600062-0000-228


Product Type	Basic Unit	Length (L)	255.0 mm
Application	Mount		



Straight pin 70 mm

600062-0210-027

Product Type	Straight Pin	Length (L)	70.0 mm
Material	Steel	Application	Secure



THETA 55 M10 Base and pallet Set, M6 50x50 grid

626109-9220-620

Product Type	Pallet Set	Material	Aluminum
Application	Secure	Grid	50 mm x 50 mm



Toggle clamp riser, L = 75 mm

600062-0344-001

Product Type	Position	Length (L)	75.0 mm
Material	Aluminum	Application	Secure



Adapter pallet OMEGA 543 to 322, comfort

626109-9512-001


Product Type	Calibration Pallet	Material	Aluminum
Application	Calibrate	Grid	Ohne



OMEGA 322 pallet, spare acrylic insert

626109-8510-012

Product Type	Glass Insert	Material	Acrylic
Application	Optical	Grid	Ohne



CMG Set ACCURA 2, 2000 X 3000 mm, 6 plates, M6, 50mm grid

600062-0210-296

Product Type	Grid Pallet	Length (L)	3000.0 mm
Material	Aluminum	Application	Secure
Width (B)	2000.0	Weight	459000.0 g
Grid	50 mm x 50 mm		



Distributor 4-fold, horizontal


626140-9134-101



MSR duplex X=1010, for Centermax

626100-9334-000

Product Type	Sensor Rack D...	Material	Aluminum
Application	Store	Measuring Area X	1010



CMG grid plate Ø 450

600062-0110-000

Product Type	Grid Pallet	Length (L)	450.0 mm
Material	Aluminum	Application	Secure
Width (B)	20.0	Weight	8500.0 g
Grid	50 mm x 50 mm		



Reference sphere holder, 214 mm, M12 base
(reference sphere not included)

600332-9165-000

Product Type	Reference Sph...	Length (L)	214.0 mm
Material	Stainl. St.	Application	Tactile



MSR duplex X=1200

626100-9324-000

Product Type	Sensor Rack D...	Material	Aluminum
Application	Store	Measuring Area X	1200



MCA signal converter

626140-9144-010

Product Type	Signal Converter	Application	Connect
--------------	------------------	-------------	---------



Reference Sphere DK 25, DG 18, M6

600332-8445-000

Product Type	Reference Sphere	Ø Sphere (DK)	25.0 mm
Length (L)	82.5 mm	Stylus Tip Mate...	Ceramic
Application	Tactile		



Storage bar for MSR 2.0 X=1200

626100-9300-005

Product Type	Sensor Rack	Length (L)	1290.0 mm
Material	Aluminum	Application	Store
Measuring Area X	1200		



Temperature interface, machine-side

626140-9121-600


Product Type	Temperature M...
--------------	------------------



Column support, universal, height 255 mm

600062-0000-964

Length (L)	255.0 mm
------------	----------



CMK grid plate 240x240x15

600062-0215-001

Product Type	Base plate	Length (L)	240.0 mm
Material	Aluminum	Application	Connect
Width (B)	240.0	Grid	15 mm x 15 mm



Temperature sensor (mini), angled, SUB-D

626140-9113-110

Accessories for CMM

The CMM can be significantly optimized in terms of performance using appropriate accessories such as pallet systems, test specimens or interchangeable magazines. ZEISS offers accessory products to improve accuracy and reproducibility and to optimize process times. CMM accessories are installed permanently or temporarily on or on the machine and are matched to the respective machine parameters. All CMM accessories are laboratory tested and approved for operation on the designated machines.

380 products

Sort results
Recommended

Change view



Reference sphere holder, 214 mm, M10 base
(reference sphere not included)


600332-9168-000

Product Type	Reference Sph...	Length (L)	214.0 mm
Material	Stainl. St.	Application	Tactile



Temperature interface, pallet-side, for fixtures

626140-9122-610



THETA RT grid pallet M4, for DuraMax

626109-9220-320

Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	15 mm x 15 mm



Articulating element, 60 mm

600062-0000-157

Ø Sphere (DK)	50.0 mm	Length (L)	60.0 mm
---------------	---------	------------	---------



O-INSPECT 863 Rail for calibration standard

626109-9515-004

Product Type	Mounting Strip	Application	Secure
--------------	----------------	-------------	--------



Lower lifting unit, type 450, L = 450 mm, anodized, PTFE-coated

600062-0330-001

Product Type	Magnetic Plate	Length (L)	450.0 mm
Material	Aluminum	Application	Adjust



Complete reference sphere kit, DK 30, 364 mm, M12 base

600332-9266-000


Product Type	Reference Set	Ø Sphere (DK)	30.0 mm
Length (L)	364.0 mm	Material	Stainl. St.
Stylus Tip Mate...	Ceramic	Application	Tactile



Plastic clamping system for O-INSPECT

626109-9511-100

Product Type	Kit	Material	Plastic
Application	Secure		



Package closed spacer plate 80x80 ETV

600062-0210-540

Ø Sphere (DK)	80.0 mm	Length (L)	80.0 mm
---------------	---------	------------	---------



OmniFix Pins Set

626109-9220-201

Product Type	Set	Application	Tactile
--------------	-----	-------------	---------



Test and calibration template VISCAN, calibrated

600779-8301-000


Product Type	Reference Tem...	Application	Optical
--------------	------------------	-------------	---------



OMEGA 543 comfort frame pallet, glass

626109-9512-023

Product Type	Frame Pallet	Material	Clear Glass
Application	Secure	Grid	Ohne



Connecting Elements D10 M6 - Hinge L40

600062-0215-017

Product Type	Connect	Length (L)	40.0 mm
Material	Stainl. St.	Application	Adjust
Width (B)	10.0		



Complete reference sphere kit, DK 30, 214 mm,
M12 base (Higher accuracy sphere)

600332-9265-001

Product Type	Reference Set	Ø Sphere (DK)	30.0 mm
Length (L)	214.0 mm	Material	Stainl. St.
Stylus Tip Mate...	Ceramic	Application	Tactile



OMEGA 543 grid pallet, M4 15x15 with
temperature interface

626109-9512-037

Product Type	Grid Pallet	Material	Aluminum
Application	Secure	Grid	15 mm x 15 mm




NO IMAGE AVAILABLE



Adapter Column D10 M4 - M6 MF - L15

600062-0215-012

Product Type	Column	Length (L)	15.0 mm
Material	Stainl. St.	Application	Connect



CMG Set ACCURA 2, 1200 X 2400 mm, 2 plates, M6, 50mm grid

600062-0210-309

Product Type	Grid Pallet	Length (L)	2400.0 mm
Material	Aluminum	Application	Secure
Width (B)	1200.0	Grid	50 mm x 50 mm



Temperature sensor (mini), straight, DIN

626140-9113-000



Test and calibration template, without calibration

600779-0030-000

Product Type	Reference Tem...	Application	Optical
--------------	------------------	-------------	---------



Multi Sensor Rack (MSR) 3-fold for O-INSPECT 543 and 863

626100-9382-002


Product Type	Sensor Rack	Material	Stainl. St.
Application	Store	Measuring Area X	150



Reference Sphere DK 30, DG 12, M6

626106-0045-000

Product Type	Reference Sphere	Ø Sphere (DK)	30.0 mm
Length (L)	58.0 mm	Stylus Tip Mate...	Ceramic
Application	Tactile		



THETA 32 Set grid M6 with chuck

626109-9220-140

Product Type	Set	Application	Secure
--------------	-----	-------------	--------



Package open spacer plate 10x30 ETV

600062-0210-499

131 products

Sort results
Recommended

Change view



Contour Arm

000000-1433-383

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Angle 1 (W1)	55.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9259-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exte...
Application	Extend		



Contour Arm

000000-1794-623

Measuring Sensor	Contourecord	Product Type	Stylus Arm
------------------	--------------	--------------	------------


Length (L)	178.5 mm	Length 1 (L1)	52.0 mm
Application	Tactile		



Contour Arm

625006-9246-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Ext...
Length (L)	73.0 mm	Application	Extend



Contour Arm

000000-1054-833

Measuring Sensor	Surfcom Flex, 1...	Product Type	Surface Stylus
Length (L)	73.0 mm	Length 1 (L1)	5.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9139-000

Product Type	Stylus Tip	Stylus Tip Geo...	Pointer
--------------	------------	-------------------	---------

Application

Tactile



Contour Arm

000000-1433-393

Measuring Sensor	Surfcom 2000	Product Type	Contour Stylus
Application	Tactile		



Contour Arm

000000-1794-624

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	26.0 mm
Application	Tactile		



Contour Arm

000000-0483-889

Measuring Sensor	Surfcom 3000/5...	Product Type	Surface Stylus
LH	130.0 mm	LV	- 21.5 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.

Stylus Tip Geo...

Blade

Application

Tactile



Contour Arm

625006-9252-000

Measuring Sensor

Surfcom NEX 1xx

Product Type

Stylus Arm Ext...

Application

Extend



Contour Arm

625006-3093-000

Product Type

Stylus Tip

Length (L)

34.0 mm

Length 1 (L1)

26.0 mm

Angle 1 (W1)

12.0 °

Stylus Tip Mate...

Tung. Carb.

Stylus Tip Geo...

Pointer

Application

Tactile

131 products

Sort results
Recommended

Change view



Contour Arm

000000-1458-687

Measuring Sensor	Surfcom 2000	Product Type	Stylus Tip
Length (L)	21.0 mm	Length 1 (L1)	16.0 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Ruby
Application	Tactile		



Contour Arm

000000-1079-359

Measuring Sensor	Surfcom Flex, 1...	Product Type	Surface Stylus
Length (L)	33.5 mm	Length 1 (L1)	0.9 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9251-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-4030-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Length (L)	65.0 mm	Application	Extend



Contour Arm

000000-1433-387

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3095-000

Product Type	Stylus Tip	Length (L)	60.0 mm
Length 1 (L1)	52.0 mm	Angle 1 (W1)	24.0 °

Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm
625006-3338-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Application	Tactile		



Contour Arm
625006-9427-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm
625006-9249-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
------------------	-----------------	--------------	------------



Contour Arm

625006-3251-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Ext...
Length (L)	65.0 mm	Length 1 (L1)	12.0 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

625006-9257-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

625006-3082-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-3255-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Length (L)	7.0 mm	Length 1 (L1)	5.0 mm
Angle 1 (W1)	24.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

625006-3100-000

Product Type	Stylus Tip	Length (L)	21.0 mm
Length 1 (L1)	13.0 mm	Angle 1 (W1)	24.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

625006-3262-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

000000-1059-167

Measuring Sensor	Surfcom Flex, 1...	Product Type	Surface Stylus
Length (L)	33.5 mm	Length 1 (L1)	7.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3092-000

Product Type	Stylus Tip	Length (L)	60.0 mm
Length 1 (L1)	52.0 mm	Angle 1 (W1)	12.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

000000-1433-416

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 30.5 mm
Angle 1 (W1)	90.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3097-000

Product Type	Stylus Tip	Length (L)	21.0 mm
Length 1 (L1)	13.0 mm	Angle 1 (W1)	24.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

625006-3119-000

Product Type	Stylus Tip	Length (L)	21.0 mm
Length 1 (L1)	13.0 mm	Stylus Tip Mate...	Ruby
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

000000-1365-332

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 4.625 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



NO IMAGE AVAILABLE

Contour Arm

000000-1458-708

Product Type	Stylus Tip
--------------	------------



Contour Arm

625006-9138-000

Product Type	Stylus Tip	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

625006-4098-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	13.0 mm
Application	Tactile		

31 products

Sort results
Recommended

Change view



Contour Arm

625006-4097-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	26.0 mm
Application	Tactile		



Contour Arm

625006-9424-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exten...
Application	Extend		



Contour Arm

000000-1084-495

Measuring Sensor	Surfcom Flex, 13...	Product Type	Surface Stylus
------------------	---------------------	--------------	----------------

Length (L)	73.5 mm	Length 1 (L1)	1.7 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

000000-1794-625

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

626108-6003-020

Measuring Sensor	Surfcom 3000/5000	Product Type	Contour Stylus
LH	50.0 mm	LV	- 4.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Application	Tactile		



Contour Arm

000000-1079-358

Measuring Sensor	Surfcom Flex, 13...	Product Type	Surface Stylus
------------------	---------------------	--------------	----------------

Length (L)	33.5 mm	Length 1 (L1)	15.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

000000-1373-770

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	130.0 mm	LV	- 15.5 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

626108-6002-020

Measuring Sensor	Surfcom 3000/5000	Product Type	Contour Stylus
LH	125.0 mm	LV	- 34.75 mm
Stylus Tip Mate...	Ruby	Application	Tactile



Contour Arm

625006-3083-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	21.0 mm
Application	Tactile		



Contour Arm
000000-1365-331

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 5.025 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm
000000-1459-403

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm
626108-6000-020

Measuring Sensor	Surfcom 3000/5000	Product Type	Contour Stylus
------------------	-------------------	--------------	----------------

LH	50.0 mm	LV	- 29.75 mm
Application	Tactile		



Contour Arm

000000-1365-333

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 30.5 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3098-000

Product Type	Stylus Tip	Length (L)	60.0 mm
Length 1 (L1)	52.0 mm	Angle 1 (W1)	24.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

625006-9431-000			
Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-9423-000			
Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exten...
Application	Extend		



Contour Arm

625006-3253-000			
Measuring Sensor	Contourecord	Product Type	Stylus Arm Exten...
Length (L)	65.0 mm	Length 1 (L1)	3.5 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

000000-1433-410

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 14.35 mm
Angle 1 (W1)	40.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3256-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exten...
Length (L)	3.5 mm	Length 1 (L1)	1.5 mm
Angle 1 (W1)	24.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

625006-4099-000


Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	115.0 mm	Length 1 (L1)	17.0 mm
Application	Tactile		



Contour Arm

625006-9255-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exten...
Application	Extend		



Contour Arm

000000-1463-971

Measuring Sensor	Surfcom 2000	Product Type	Contour Stylus
LH	150.0 mm	LV	- 21.5 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Tactile		



Contour Arm

625006-9223-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		

131 products

Sort results
Recommended

Change view



Contour Arm

000000-1433-396

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3081-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	115.0 mm	Length 1 (L1)	17.0 mm
Application	Tactile		



Contour Arm

000000-1365-330

Measuring Sensor	Surfcom 2000	Product Type	Contour Stylus
LH	130.0 mm	LV	- 21.5 mm

Angle 1 (W1)	24.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Tactile		



Contour Arm

625006-9248-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-3096-000

Product Type	Stylus Tip	Length (L)	34.0 mm
Length 1 (L1)	26.0 mm	Angle 1 (W1)	24.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

000000-1079-360

Measuring Sensor	Surfcom Flex, 1...	Product Type	Surface Stylus
------------------	--------------------	--------------	----------------

Length (L)	73.5 mm	Length 1 (L1)	15.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9254-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exte...
Application	Extend		



Contour Arm

000000-1365-334

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 14.35 mm
Angle 1 (W1)	30.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9253-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

625006-3099-000

Product Type	Stylus Tip	Length (L)	34.0 mm
Length 1 (L1)	26.0 mm	Angle 1 (W1)	24.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

000000-1365-329

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 14.35 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9426-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

625006-3336-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	13.0 mm
Application	Tactile		



Contour Arm

625006-9437-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

000000-1433-395

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3102-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Length (L)	65.0 mm	Length 1 (L1)	8.0 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

625006-3275-000

Product Type	Stylus Tip	Length (L)	21.0 mm
Length 1 (L1)	13.0 mm	Stylus Tip Mate...	Ruby
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3337-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	52.0 mm
Application	Tactile		



Contour Arm

625006-4087-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Length (L)	65.0 mm	Length 1 (L1)	12.0 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		





Contour Arm

625006-9201-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-4096-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Application	Extend		



Contour Arm

625006-3257-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Length (L)	12.0 mm	Length 1 (L1)	2.9 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

000000-0483-877

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile

131 products

Sort results
Recommended

Change view



Contour Arm

000000-1433-359

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

626108-6008-020

Measuring Sensor	Surfcom 3000/5...	Product Type	Contour Stylus
LH	50.0 mm	LV	- 15.5 mm
Application	Tactile		



Contour Arm

625006-4092-000


Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Length (L)	8.0 mm	Length 1 (L1)	7.0 mm

Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm
625006-9258-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exte...
Application	Extend		



Contour Arm
625006-3047-000

Measuring Sensor	Surfcom Flex, 1...	Product Type	Surface Stylus
Length (L)	22.0 mm	Length 1 (L1)	7.0 mm
Angle 1 (W1)	90.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm
625006-4093-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
------------------	--------------	--------------	--------------------

Application

Extend



Contour Arm

625006-3938-000

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 14.5 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3254-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Application	Extend		



Contour Arm

000000-1382-479

Measuring Sensor	Surfcom 2000	Product Type	Contour Stylus
Application	Tactile		



Contour Arm

625006-4088-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Ext...
Length (L)	65.0 mm	Length 1 (L1)	4.5 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

000000-1433-361

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3094-000

Product Type	Stylus Tip	Length (L)	21.0 mm
Length 1 (L1)	13.0 mm	Angle 1 (W1)	12.0 °

Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

000000-1433-439

Measuring Sensor	Surfcom 2000	Product Type	Contour Stylus
Application	Tactile		



Contour Arm

625006-4089-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Length (L)	65.0 mm	Application	Extend



Contour Arm

625006-9422-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Extensi...
Application	Extend		



Contour Arm

625006-3261-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Extensi...
Stylus Type	Straight	Application	Extend
Weight	7.0 g		



Contour Arm

625006-9141-000

Measuring Sensor	Contourecord	Product Type	Stylus Tip
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

000000-1084-496

Measuring Sensor	Surfcom Flex, 1...	Product Type	Surface Stylus
Length (L)	73.5 mm	Length 1 (L1)	8.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

626108-6004-020

Measuring Sensor	Surfcom 3000/5...	Product Type	Contour Stylus
LH	50.0 mm	LV	- 6.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Application	Tactile		



Contour Arm

625006-3396-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-9216-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Extensi...
Application	Extend		



Contour Arm

000000-1433-446

Measuring Sensor	Surfcom 2000	Product Type	Contour Stylus
Application	Tactile		



Contour Arm

625006-4091-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Extensi...
Length (L)	12.0 mm	Length 1 (L1)	9.0 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

625006-4090-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Ext...
Application	Extend		

SFG Styli

ZEISS works with Japanese measuring machine manufacturer ACCRETECH, the leading provider in the field of surface, contour and form measuring machines. Form and surface measuring systems seamlessly integrate into the range of industrial measuring technology from ZEISS. This partnership ensures that our customers have a global service network.

131 products

Sort results
Recommended

Change view



Contour Arm

625006-3258-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Ext...
Length (L)	7.0 mm	Length 1 (L1)	5.0 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

625006-4094-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

000000-1457-029

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9256-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exte...
Application	Extend		



Contour Arm

000000-1373-772

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	130.0 mm	Angle 1 (W1)	60.0 °
Stylus Tip Mate...	Diamond	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

625006-9147-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-3252-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Ext...
Length (L)	65.0 mm	Length 1 (L1)	7.0 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

625006-3274-000

Product Type	Stylus Tip	Length (L)	60.0 mm
Length 1 (L1)	52.0 mm	Stylus Tip Mate...	Ruby
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

000000-1433-394

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9436-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Ext...
Length (L)	73.0 mm	Application	Extend



Contour Arm

625006-9225-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-3273-000

Product Type	Stylus Tip	Length (L)	21.0 mm
Length 1 (L1)	13.0 mm	Stylus Tip Mate...	Ruby
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3226-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-3271-000

Product Type	Stylus Tip	Length (L)	60.0 mm
Length 1 (L1)	52.0 mm	Stylus Tip Mate...	Ruby
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3272-000

Product Type	Stylus Tip	Length (L)	34.0 mm
Length 1 (L1)	26.0 mm	Stylus Tip Mate...	Ruby
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3335-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	26.0 mm
Application	Tactile		



Contour Arm

000000-1433-417

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



NO IMAGE AVAILABLE



Contour Arm

625006-3113-000

Product Type	Stylus Tip	Length (L)	34.0 mm
Length 1 (L1)	26.0 mm	Stylus Tip Mate...	Ruby
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

000000-1079-356

Measuring Sensor	Surfcom Flex, 1...	Product Type	Surface Stylus
Length (L)	33.5 mm	Length 1 (L1)	1.7 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-4095-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

000000-1433-442

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-8037-000

Measuring Sensor	Surfcom 3000/5...	Product Type	Contour Stylus
------------------	-------------------	--------------	----------------

LH	125.0 mm	Angle 1 (W1)	24.0 °
Stylus Tip Mate...	Tung. Carb.	Application	Tactile



Contour Arm

625006-3260-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Ext...
Length (L)	12.0 mm	Length 1 (L1)	2.9 mm
Angle 1 (W1)	24.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		

Pallet systems


Pallet systems are add-ons that are placed on the pallets or fixed in place to improve the CT scan. Different goals can be pursued. This includes improving machine utilization, increasing the product or increasing flexibility.

17 products

Sort results

Recommended

Change view



OmniFix CT reach

626170-0011-670


Machine
METROTOM 1500, VoluMax 9 titan



OmniFix CT Kit Elevation columns

626140-9300-100

Product Type	Mount	Material	Carbon Fiber
Application	Tomographic	Machine	METROTOM



OmniFix CT spike plastic Ø160

626170-0011-808

Machine
METROTOM 1500, METROTOM 80...



OmniFix CT spike plastic Ø70

626170-0011-809

Machine

METROTOM 1500, METROTOM 80...




OmniFix CT spike plastic Ø20

626170-0011-810

Machine

METROTOM 1500, METROTOM 80...




OmniFix CT spike steel Ø160

626170-0011-805

Machine

METROTOM 1500, METROTOM 80...



OmniFix CT spike steel Ø70

626170-0011-806

Machine

METROTOM 1500, METROTOM 80...



OmniFix CT spike steel Ø20

626170-0011-807

Machine
METROTOM 1500, METROTOM 80...



OmniFix CT Tomostage kit magnet Ø70x340

626140-9400-013

Product Type	Pallet System	Machine
		METROTOM



OmniFix CT Tomostage kit magnet Ø100x340

626140-9400-012

Product Type	Pallet System	Machine
		METROTOM



OmniFix CT Tomostage kit magnet Ø170x340

626140-9400-011

Product Type	Pallet System	Machine
		METROTOM



OmniFix CT Tomostage kit magnet Ø170x500

626140-9400-007

Product Type	Pallet System	Application	Tomographic
Machine	METROTOM 800, METROTOM 150...		



OmniFix CT Tomostage kit foam Ø100x340mm

626140-9400-009

Machine	METROTOM 800, METROTOM 150...
---------	-------------------------------



OmniFix CT Tomostage kit foam Ø170x340mm

626140-9400-018

Machine	METROTOM 800, METROTOM 150...
---------	-------------------------------



TomoStage, 6 levels

626140-9400-001

Product Type	Carbon Fiber To...	Material	Carbon Fiber
Application	Tomographic	Machine	METROTOM



TomoStage, 4 levels

626140-9400-003

Product Type	Carbon Fiber To...	Material	Carbon Fiber
Application	Tomographic	Machine	
		METROTOM	



TomoStage, 4 levels

626140-9400-002

Product Type	Carbon Fiber To...	Material	Carbon Fiber
Application	Tomographic	Machine	
		METROTOM	

Pallet holder and pallet


ZEISS pallet systems can be used to increase machine utilization. While the machine is still scanning, the next workpiece is positioned on another pallet. The system can be replaced in just a few seconds. The pallet systems, fixtures, foams and machine accessories can be added to the pallets.

5 products

Sort results

Recommended


Change view



GAMMA 800 pallet with magnetic support

626140-7210-010

Product Type	Blank Pallet	Material	Aluminum
Application	Tomographic	Machine	
		METROTOM 800	
Grid	Ohne		



GAMMA 1500 Palette G2

626140-8210-011

Machine
VoluMax 9 titan



GAMMA 1500 pallet holder G2

626140-8210-021

Machine
VoluMax 9 titan



GAMMA 1500 pallet holder G1

626140-8210-020

Product Type	Base Plate	Material	Aluminum
Application	Tomographic	Machine	METROTOM 1500



GAMMA 1500 pallet

626140-8210-010


Product Type	Adjustment Pallet	Material	Aluminum
Application	Tomographic	Machine	METROTOM 1500
Grid	Blank		



Scanning spray (non-volatile), 1 can

000000-0626-415

Product Type	Matting Spray	Application	Prepare
--------------	---------------	-------------	---------



Reference Markers 8.0 mm, retro-reflective, non-coded, 1000 piece

604001-3807-000

Machine

ARAMIS



Reference markers 5.0 mm, coded 218-322, white, magnetic

604001-2022-000

Machine

ATOS PLUS, TRITOP



Reference markers 6.0 mm, non-coded, retro-reflective, 2000 piece

604006-2301-000

Machine

ARAMIS, T-SCAN hawk, T-SCAN h...




Reference markers 8.0 mm, non-coded, white, strong adhesive strength, temperature resistant, 1500 piece

604003-5248-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference markers 3.0 mm, white, non-coded, medium adhesive strength, 3000 piece

604003-5241-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference markers 10.0 mm, coded 323-427,
white, magnetic

000250-0004-749

Machine

ATOS PLUS, TRITOP



Reference markers 5.0 mm, coded 323-427, white,
magnetic

604001-2023-000

Machine

ATOS PLUS, TRITOP



Reference markers 12.0 mm, non-coded, white,
light adhesive strength, 5000 piece

604001-2060-000

Machine

ATOS, TRITOP, ATOS PLUS, GOM ...



Point markers 5.0 mm, white, non-coded, light
adhesive strength, 3000 piece

604003-5243-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference markers 3.0 mm, coded 323-427, white,
magnetic

604001-2019-000

Machine

ATOS PLUS, TRITOP



AESUB Yellow, 1 can

000000-0727-538



Reference Markers 25.0 mm, retro-reflective, non-
coded, 500 piece

000250-0004-741

Machine



Point markers 8.0 mm, non-coded, white, adhesive strength medium, 1500 piece

604003-5247-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...




Reference markers 6.0 mm, non-coded, retro-reflective, magnetic, 500 piece

604006-2299-000

Machine

ARAMIS, T-SCAN hawk, T-SCAN h...



Reference Markers 8.0 mm, ceramic, non-coded, 48 piece

000250-0004-773

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference adapter, MV300-MV700, white, low adhesive strength

000250-0002-860

Machine

ARAMIS



AESUB Green, 1-liter

000000-0716-216



Reference markers 0.8 mm, white, non-coded, medium adhesive strength, 3000 piece

604003-5233-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



AESUB Orange, 1 can

000000-0716-217



AESUB Green, 5-liter

000000-0727-539




Reference markers 1.5 mm, white, non-coded,
medium adhesive strength, 3000 piece.

604003-5236-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...




Reference markers 3.0 mm, white, non-coded,
light adhesive strength, 3000 piece

604003-5240-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference markers 3.0 mm, white, non-coded,
strong adhesive strength, temperature resistant,
3000 piece

604003-5242-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference markers 0.4 mm, white, non-coded,
medium adhesive strength, 3000 piece

604003-5230-000


Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



AESUB Yellow, 1 case

000000-0732-339



Reference markers 5.0 mm, white, coded 8-427,
strong adhesive strength

604001-4943-000

Machine

ATOS PLUS, TRITOP




Point markers 5.0 mm, non-coded, white,
magnetic, magnetic, 100 piece

604001-2924-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Machine

AESUB Orange, 1 case

Reference Markers 1.5 mm, retro-reflective, non-coded, 1000 piece

Machine

ARAMIS



Reference markers 3.0 mm, non-coded, retro-reflective, 2000 piece

604006-2300-000

Machine

ARAMIS, T-SCAN hawk, T-SCAN h...



Reference markers 3.0 mm, coded 113-217, white, magnetic

604001-2017-000

Machine

ATOS PLUS, TRITOP



Reference markers 10.0 mm, coded 218-322, white, magnetic

000250-0004-748

Machine

ATOS PLUS, TRITOP



AESUB Blue, 1 can

000000-0716-215



AESUB White, 1 can

000000-0716-219



Reference markers 1.5 mm, white, non-coded,
strong adhesive strength, temperature resistant,
3000 piece

604003-5239-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Point markers 3.0 mm, coded 8-427 , white, strong adhesive strength , 419 piece

604003-7729-000

Machine

ATOS PLUS, TRITOP



Scanning spray (volatile), 1 can


000000-0622-092

Product Type

Matting Spray

Application

Prepare



Reference Markers 3.0 mm,ceramic, non-coded, 368 piece

604001-2111-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...

Optical 3D

64 products

Sort results
Recommended

Change view

Machine

Coding

Diameter

Adhesive Strength

Magnetic

More Filters



Reference adapter, MV700-MV1500, white, low adhesive strength

604005-9137-000

Machine
ARAMIS



Reference markers 5.0 mm, coded 8-112, white, magnetic

604001-2020-000

Machine
ATOS PLUS, TRITOP



AESUB Blue, 1 case

000000-0732-336



Reference Markers 12.0 mm, retro-reflective, non-coded, 1000 piece

000250-0004-760

Machine

ARAMIS



Reference markers 0.8 mm, white, non-coded, strong adhesive strength, temperature resistant, 3000 piece

604003-5234-000

Machine

ATOS, ATOS PLUS, ARAMIS, GOM ...



Reference Markers 18.0 mm, retro-reflective, non-coded, 1000 piece

000250-0004-834

Machine

ARAMIS




Reference markers 1.5 mm, coded 8-427, white, medium adhesive strength

000250-0004-953

Machine

ATOS PLUS, TRITOP



Reference Markers 3.0 mm, retro-reflective, non-coded, 1000 piece

000250-0004-897


Machine

ARAMIS



AESUB White, 1 case

000000-0732-338



Reference Markers 5.0 mm,ceramic, non-coded,
126 piece

000250-0004-743

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference markers 0.8 mm, coded 8-427, white,
medium adhesive strength

604002-4965-000

Machine

ATOS PLUS, TRITOP



Reference markers 5.0 mm, coded 113-217, white,
magnetic

604001-2021-000

Machine

ATOS PLUS, TRITOP



Reference markers 10.0 mm, coded 8-427, white, medium adhesive strength

000250-0004-840

Machine

ATOS PLUS, TRITOP



Reference markers 8.0 mm, white, non-coded, magnetic, 100 piece

000250-0004-775

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...




Reference markers 1.5 mm, white, non-coded, light adhesive strength, 3000 piece

604003-5235-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference Markers 5.0 mm, retro-reflective, non-coded, 1000 piece

000250-0004-754

Machine

ARAMIS



Point markers 3.0 mm, non-coded, white, magnetic, 100 piece

604001-4892-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference markers 5.0 mm, white, non-coded,
strong adhesive strength, temperature resistant,
3000 piece

604003-5245-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference markers 10.0 mm, coded 113-217,
white, magnetic

000250-0004-747

Machine

ATOS PLUS, TRITOP



Reference markers 3.0 mm, coded 218-322, white,
magnetic

604001-2018-000

Machine

ATOS PLUS, TRITOP



Point markers 5.0 mm, coded 8-427, white,
medium adhesive strength, 419 piece

604001-2547-000

Machine

ATOS PLUS, TRITOP



Reference markers 5.0 mm, white, non-coded,
medium adhesive strength, 3000 piece

604003-5244-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference markers 0.4 mm, white, non-coded,
strong adhesive strength, temperature resistant,
3000 piece

604003-5231-000

Machine

ARAMIS, ATOS, ATOS PLUS, GOM ...



Reference markers 10.0 mm, coded 8-112, white,
magnetic

604001-2024-000

Machine

ATOS PLUS, TRITOP


Foams and polymorphs

Foams and polymorphs offer maximum flexibility for single and serial measurements with products whose contour cannot be fixed with conventional clamping equipment or whose material density is low.

5 products

Sort results
Recommended

Change view



OmniFix CT foam 9,63 kg/m³
626140-9312-010

Product Type Styrofoam Block Machine
METROTOM 1, METROTOM 6 sco...



OmniFix CT foam curved 0,018 g/cm³ without metal plate, 2 pieces
626140-9312-122

Machine
METROTOM 1, METROTOM 6 sco...



Styrofoam block, 25° B120, with metal plate, 10 pieces
626140-9312-120

Product Type Styrofoam Block Application Tomographic
Machine
METROTOM 1, METROTOM 6 sco...



Polymorph natur 500g

000000-0652-795



Polymorph natur 1000g

000000-0652-796

Fixtures

The clamping equipment assists you in positioning and is therefore vital for a good result. ZEISS clamping equipment for CT and all accessories is universally designed: they are suitable for a wide range of geometries and devices. You can choose from well thought-out kits, the components of which can also be purchased separately, as well as universal clamping equipment such as vise and three-jaw chucks.

7 products

Sort results

Recommended

Change view



OmniFix CT flex

626170-0011-580



OmniFix plastic ring chuck Ø70 mm

626170-0011-160


Product Type	Mount	Material	Plastic
Application	Tomographic		



OmniFix CT 3 jaw chuck Ø35

626170-0011-165

Application	Tomographic
-------------	-------------



OmniFix CT vice - size 50

626170-0011-141

Application Tomographic



Plastic knuckle joint for plastic jaw chuck Ø70 mm

626170-0011-155

Product Type	Knuckle Element	Material	Plastic
Application	Tomographic		



CT buckling element 3 jaw chuck Ø35

626170-0011-156

Application Tomographic



CT buckling element vice size 50

626170-0011-150

Application Tomographic

CMM Stylus Kits

Stylus system kits are the ideal initial equipment for your coordinate measuring machine. Created from practical experience, they contain a large number of selected components for constructing stylus systems.

We offer well-matched and extensive kits for measuring large and small workpieces. Special tools and adjustment aids ensure fast and reliable assembly.

All individual parts in the stylus kits are available from stock.

M5

M5

Stylus Kits M5 for VAST/VAST Gold systems

M3_{XXT}

M3 XXT

Stylus Kits M3 for ZEISS VAST XXT systems

M3_{RENISHAW}

M3 RENISHAW

Stylus Kits M3 for touch trigger probes and RENISHAW systems

M2

M2

Stylus Kits M2 for touch trigger and RENISHAW systems

RST

RST

Stylus Kits for ZEISS RST systems

CMM Styli

The stylus is the contact point of the machine with the component to be measured. It deflects the measurement data acquisition in the probe. The size and design of the stylus used is determined by the characteristic to be measured. Key parameters for styli are accuracy, rigidity and service life, which are primarily determined by the materials used and the manufacturing technology. The quality of the stylus is a decisive factor in the quality of the measuring result. The stylus service life is primarily determined by the type of shaft processing and the quality of the connection between the stylus tip and the shaft. High-end production processes and technologies make ZEISS the technology leader in the industry.

ZEISS styli are available in various versions. A large portfolio of standard styli for M2, M3, M3XXT or M5 threads is available. Different stylus tips made of different materials and different shaft designs can be purchased for these styli. Furthermore, there are also non-threaded styli and special styli for form, contour and surface measurements.

[Learn more about CMM Styli](#)



M5

Styli with M5 thread are the ideal choice for the ZEISS VAST probe system.



M3 XXT

Styli with M3 thread and an enlarged 5 mm base suitable for the ZEISS VAST XXT scanning sensors



M3 REN

Styli with M3 thread suitable for ZEISS RST, Renishaw SP and Hexagon HP-S sensors



M2


Styli with M2 thread suitable for Renishaw TP and Hexagon HP touch probes



Without Thread

Styli without thread can be combined with clamping inserts to form various stylus configurations.

CMM Extensions

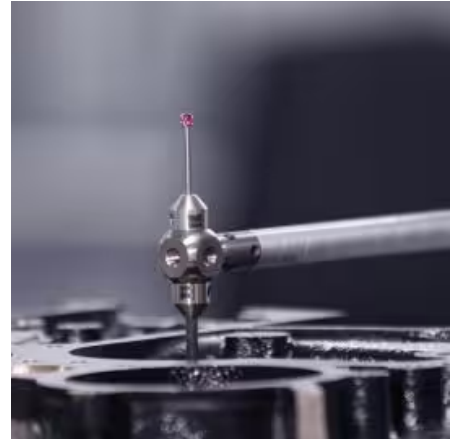

The perfect extension for your accuracy requirements

Measured values from coordinate measuring machines depend greatly on how well the stylus system reacts and reads the surface properties. The sensors contact to the workpiece is provided through the styli, extensions and the adapter plate. Therefore, as part of the overall probe system, extensions have a significant influence on measuring uncertainty. For touch trigger sensors - such as the M2 and M3 systems - the extensions are still typically made of metal, as these materials have little effect on the measurement uncertainty compared to scanning technology.

For tactile scanning sensors, ZEISS REACH CFX® carbon fiber extensions offer benefits in every aspect, whether they are entry level or designed for maximum precision. Titanium and aluminum are older technologies and not recommended for CMMs. ZEISS REACH CFX® carbon fiber extensions are not only light and thermally stable in length, but also resistant to bending and torsion errors. This reduces deviations by up to five times and prevents expensive measurement errors due to inaccurate measuring results.



REACH CFX® for your accuracy requirements

Three versions of the ZEISS REACH extensions are available for budget and accuracy requirements. The price of CFX® 1 is comparable with titanium or aluminum extensions, but performs significantly better than these metals in terms of precision. CFX® 3 has a significantly higher accuracy compared to the CFX 1 extensions. ZEISS REACH CFX® 5 offers the highest precision and technical attributes. This quality is unsurpassed on the market.

We recommend: ZEISS REACH CFX® 1 for: ZEISS SPECTRUM, ZEISS CONTURA and comparable CMMs. ZEISS REACH CFX® 3 for: ZEISS PRISMO, ZEISS PRISMO fortis, ZEISS ACCURA and similar CMMs. ZEISS REACH CFX® 5 for: ZEISS PRISMO verity, ZEISS PRISMO ultra, ZEISS MICURA, ZEISS XENOS.

CMM Extensions

During the tactile measurement of a workpiece, many features may be difficult to access. For these cases a stylus extension can be used. While metal extensions are acceptable for touch trigger sensors, carbon fiber is a better choice for tactile scanning sensors.

[Learn more about CMM Extensions](#)



M5 CFX® extensions

ZEISS REACH CFX® M5 extensions are designed for ZEISS VAST/VAST Gold sensors



M5 Titanium extension

Use as intermediate connections for lengths of 30 mm or less



M3 XXT CFX® extensions

ZEISS REACH CFX® 1, M3 XXT extensions. Designed for the ZEISS VAST XXT measuring sensor



M3 REN extensions

M3 extensions suitable for M3 tactile sensors



M2 extensions

M2 extensions suitable for M2 tactile sensors




M5 CFX® plate extensions

Extensions adapted directly to the adapter plate provide higher performance and better accuracy



M5 pro CFX® extensions

ZEISS REACH CFX® M5 pro extensions for faster and reliable assembly



Cone receiver, M5 system

626107-1015-105

Product Type	Rotary Elements	Length (L)	15.0 mm
Material	Titanium	Connection Type	M5
Application	Connect	Ø Body (DG)	11.0 mm
Weight	5.0 g	Connection Typ...	Cone Receiver

265 products

Sort results
Recommended


Change view



Angle block long, ThermoFit Pro system

626107-6022-062


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	30.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle piece with cone adapter

626103-6020-069


Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	69.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT



Star element with cone adapter, 3 x DS 1.5

626103-6180-003


Product Type	Star Element	Length (L)	4.7 mm
Angle 1 (W1)	90.0 °	Connection Type	M3 XXT
Measurement L...	2.5 mm	Ø Shaft (DS)	1.5 mm
Application	Connect	Ø Body (DG)	5.0 mm
Width (B)	7.9	Weight	1.0 g



Angle piece with cone adapter

626107-6020-070


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	70.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle block long, ThermoFit Pro system

626107-6022-279


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	0.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Cube, M5 8 sided, Aluminum

626105-6010-000

Product Type	Cube	Angle 1 (W1)	45.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Ø Body (DG)	29.0 mm
Width (B)	15.0	Weight	23.2 g
Connection Typ...	M5		



Rotary piece, with cone adapter, small

626107-6280-020


Product Type	Rotary Elements	Length (L)	5.0 mm
Material	Titanium	Connection Type	Cone Adapter
Application	Connect	Ø Body (DG)	11.0 mm
Weight	2.5 g	Connection Typ...	M5



Double angle piece with cone adapter, M5

626107-6023-018


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	80.0 °	Angle 2 (W2)	- 54.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle block short, ThermoFit Pro system

626107-6021-112

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	45.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



626107-6022-750


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	309.7 °	Angle 2 (W2)	37.8 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle block long, Winkelstück lang, W1 180,0-W2 066,5,

626107-6022-574

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	66.5 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Cube, with cone adapter, 3 sided M5

626107-6280-090


Product Type	Star Element	Length (L)	17.5 mm
Angle 1 (W1)	120.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Connect	Ø Body (DG)	11.0 mm
Width (B)	15.0	Weight	15.0 g



Blank Angle block with cone adapter

626107-6020-000


Product Type	Angle	Length (L)	16.0 mm
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	11.0 g
Connection Typ...	M5		



Rotary joint, M5 with 3 sided cube

626105-6280-100

Product Type	Stylus Holder	Length (L)	32.5 mm
Angle 1 (W1)	120.0 °	Connection Type	M5
Measurement L...	25.0 mm	Application	Connect
Ø Body (DG)	11.0 mm	Width (B)	15.0
Weight	19.0 g	Connection Typ...	M5




Angle piece with cone adapter

626107-6020-050

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	50.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm


Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Star element with cone adapter, 4 X DS 1

626107-6280-050

Product Type	Star Element	Length (L)	10.0 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	7.0 mm
Ø Shaft (DS)	1.0 mm	Application	Connect
Ø Body (DG)	11.0 mm	Weight	4.1 g



Offset rotating knuckle joint, M2

626112-5000-003


Product Type	Rotary Elements	Length (L)	13.0 mm
Connection Type	M2	Application	Connect
Ø Body (DG)	3.5 mm	Weight	1.0 g



Double angle piece with cone adapter, M5

626107-6023-013

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	- 80.4 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Screw, M5 for ThermoFit cube


626107-6060-006

Product Type	Screw	Length (L)	30.0 mm
Material	Stainl. St.	Connection Type	M5 Pro
Measurement L...	25.0 mm	Application	Connect
Width (B)	10.0	Weight	27.0 g



626107-6022-746

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	141.0 °	Angle 2 (W2)	41.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Offset rotating knuckle joint, M3 XXT

626103-6180-001

Product Type	Rotary Elements	Length (L)	10.0 mm
Connection Type	M3 XXT	Application	Connect
Width (B)	5.0	Weight	1.0 g



Rotary joint, M5 with Star element 4 X DS2

626105-6280-130

Product Type	Stylus Holder	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Connection Type	M5
Ø Shaft (DS)	2.0 mm	Application	Connect
Ø Body (DG)	11.0 mm	Weight	11.0 g
Connection Typ...	Without thread		




Angle block short, ThermoFit Pro system

626107-6021-183

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	75.0 °
Material	Titanium	Connection Type	M5 Pro

Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Cone receiver, M3 XXT System

626103-6180-002


Product Type	Rotary Elements	Length (L)	7.0 mm
Material	Titanium	Connection Type	M3 XXT
Application	Connect	Ø Body (DG)	5.0 mm
Weight	0.55 g	Connection Typ...	Cone Adapter



Angle piece with cone adapter

626107-6020-398


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	86.1 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Fixed single styli holder, DS 1.5 Styli not included

600341-8160-000

Product Type	Stylus Holder	Length (L)	45.0 mm
Connection Type	M5	Measurement L...	22.0 mm
Ø Shaft (DS)	1.5 mm	Application	Connect
Ø Body (DG)	11.0 mm	Width (B)	6.0
Weight	16.0 g	Connection Typ...	Without thread



End angle piece with cone adapter, M5

626107-6280-010


Product Type	Angle	Length (L)	15.5 mm
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Connect
Ø Body (DG)	11.0 mm	Width (B)	5.5
Weight	4.7 g	Connection Typ...	M5



Cube M5, Titanium 15 mm with cone and countersink

626115-6110-002

Product Type	Cube	Length (L)	15.0 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	M5	Width (B)	15.0
Weight	13.0 g	Connection Typ...	M5




Angle piece with cone adapter

626103-6020-060

Product Type	Angle	Length (L)	7.75 mm
--------------	-------	------------	---------


Angle 1 (W1)	60.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT

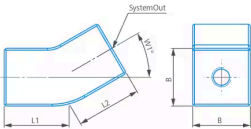

Angle piece, M5

626105-6020-050

Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	50.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Adapter, M5 bolt, M4 drill hole

602030-0318-000


Product Type	Adapter	Length (L)	10.0 mm
Material	Steel	Connection Type	M5
Application	Connect	Ø Body (DG)	11.0 mm
Weight	6.2 g	Connection Typ...	M4



Angle piece with cone adapter

626107-6020-100


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	100.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Star element, 5 x DS 1

600341-8367-000

Product Type	Stylus Holder	Length (L)	10.0 mm
Connection Type	M5	Measurement L...	3.0 mm
Ø Shaft (DS)	1.0 mm	Application	Tactile
Ø Body (DG)	11.0 mm	Weight	3.0 g
Connection Typ...	Without thread		



Cube, M3 XXT 8 sided

626103-6110-007


Product Type	Cube	Length (L)	14.0 mm
Angle 1 (W1)	45.0 °	Material	Titanium
Connection Type	M3 XXT	Application	Connect
Ø Body (DG)	14.0 mm	Width (B)	5.0
Weight	2.3 g	Connection Typ...	M3 XXT



Angle piece with cone adapter

626107-6020-509


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	17.2 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle piece, M5

626105-6020-055


Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	55.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Star element, 5 x DS 2

626115-5000-199


Product Type	Stylus Holder	Length (L)	10.0 mm
Connection Type	M5	Measurement L...	3.0 mm
Ø Shaft (DS)	2.0 mm	Application	Tactile
Ø Body (DG)	11.0 mm	Weight	6.0 g
Connection Typ...	Without thread		



Angle block short, ThermoFit Pro system

626107-6021-192

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	270.0 °	Angle 2 (W2)	10.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Screw, M5 for ThermoFit cube

626107-6060-001


Product Type	Screw	Length (L)	15.0 mm
Material	Stainl. St.	Connection Type	M5 Pro
Measurement L...	10.0 mm	Application	Connect
Weight	3.7 g		



Double angle piece with cone adapter, M5

626107-6023-004

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	46.0 °	Angle 2 (W2)	- 42.3 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g

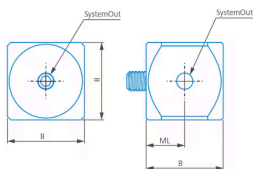

Cube, M5 Titanium 20 mm with removeable screw

626115-6110-003


Product Type	Cube	Length (L)	20.0 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	M5	Measurement L...	10.0 mm
Application	Connect	Width (B)	20.0
Weight	32.0 g	Connection Typ...	M5



Angle block long, W1 271,1-W2 035,9 The

626107-6022-730

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	271.1 °	Angle 2 (W2)	35.9 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Double angle piece with cone adapter, M5

626107-6023-008

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	30.0 °	Angle 2 (W2)	- 60.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle block short, ThermoFit Pro system

626107-6021-229


Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	60.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Angle piece with cone adapter

626107-6020-501

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	0.9 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Cube, M2 Titanium

602030-9103-000


Product Type	Star Element	Length (L)	5.4 mm
Material	Titanium	Connection Type	M2
Application	Connect	Ø Body (DG)	7.0 mm
Weight	1.6 g	Connection Typ...	M2



Angle piece with cone adapter

626107-6020-493


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	38.8 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle block long, ThermoFit Pro system

626107-6022-141


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	30.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Adapter, M2 bolt, M3 drill hole

602030-8345-000


Product Type	Adapter	Length (L)	5.0 mm
Material	Stainl. St.	Connection Type	M2
Application	Connect	Ø Body (DG)	4.0 mm
Weight	0.3 g	Connection Typ...	M3



Blank angle block long, ThermoFit Pro System

626107-6022-000

Product Type	Angle	Length (L)	43.0 mm
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	27.0 g
Connection Typ...	M5		



Angle block short, ThermoFit Pro system

626107-6021-182


Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	30.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Rotary joint, M5 with Star element 6 X DS 1

626105-6280-140


Product Type	Stylus Holder	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Connection Type	M5
Ø Shaft (DS)	1.0 mm	Application	Connect
Ø Body (DG)	11.0 mm	Weight	11.0 g
Connection Typ...	Without thread		



Star element with cone adapter, 4 X DS 1.5

626107-6280-110

Product Type	Star Element	Length (L)	10.0 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	7.0 mm
Ø Shaft (DS)	1.5 mm	Application	Connect
Ø Body (DG)	11.0 mm	Weight	4.1 g



Cube, M5 8 sided, 30 ° incline, Titanium

626105-6110-030


Product Type	Cube	Angle 1 (W1)	30.0 °
Material	Titanium	Connection Type	M5
Application	Connect	Ø Body (DG)	41.0 mm
Width (B)	15.0	Weight	66.0 g
Connection Typ...	M5		



Angle block long, ThermoFit Pro system

626107-6022-142


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	270.0 °	Angle 2 (W2)	30.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Cube, with cone adapter, 4 sided M3

626107-6280-060


Product Type	Star Element	Length (L)	10.0 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	5.0 mm
Application	Connect	Ø Body (DG)	11.0 mm
Weight	5.0 g	Connection Typ...	M3 XXT



Counterweight for stylus systems

626103-6270-001


Product Type	Counterweight	Length (L)	9.6 mm
Material	Stainl. St.	Connection Type	M3 XXT
Application	Connect	Ø Body (DG)	7.0 mm
Weight	3.0 g		



Counterweight for stylus systems

626103-6270-000


Product Type	Counterweight	Length (L)	6.3 mm
Material	Stainl. St.	Connection Type	M3 XXT
Application	Connect	Ø Body (DG)	7.0 mm
Weight	2.0 g		



Counterweight for stylus systems

626105-6270-007

Product Type	Counterweight	Length (L)	52.2 mm
Material	Stainl. St.	Connection Type	M5
Application	Connect	Ø Body (DG)	25.0 mm
Weight	200.0 g		



cube, M3XXT, 180 degree, double

626103-6110-002


Product Type	Cube	Length (L)	13.0 mm
Angle 1 (W1)	180.0 °	Material	Titanium
Connection Type	M3 XXT	Application	Connect
Width (B)	5.0	Weight	1.1 g
Connection Typ...	M3 XXT		



Double angle piece with cone adapter, M5

626107-6023-019


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	44.4 °	Angle 2 (W2)	- 54.9 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle block short, ThermoFit Pro system

626107-6021-162

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	5.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Angle block long, ThermoFit Pro system

626107-6022-216


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	15.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle block short, ThermoFit Pro system

626107-6021-153

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	270.0 °	Angle 2 (W2)	5.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Rotary piece, with cone adapter, long

626107-6280-030

Product Type	Rotary Elements	Length (L)	15.0 mm
Material	Titanium	Connection Type	Cone Adapter
Application	Connect	Ø Body (DG)	11.0 mm
Weight	6.9 g	Connection Typ...	M5



Rotary joint, M5 20 mm

626105-6280-090

Product Type	Rotary Elements	Length (L)	30.0 mm
Material	Titanium	Connection Type	M5


Application	Connect	Ø Body (DG)	20.0 mm
Weight	40.0 g	Connection Typ...	M5



Angle piece with cone adapter

626107-6020-499


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	23.9 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Double angle piece with cone adapter, M5

626107-6023-005

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	60.0 °	Angle 2 (W2)	- 60.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Adapter, M3 bolt, M2 drill hole

602030-8341-000

Product Type	Adapter	Length (L)	5.0 mm
Material	Stainl. St.	Connection Type	M3
Application	Connect	Ø Body (DG)	4.0 mm
Weight	0.5 g	Connection Typ...	M2



Offset rotating knuckle joint, M2

602030-9101-000

Product Type	Rotary Elements	Length (L)	8.0 mm
Connection Type	M2	Application	Connect
Width (B)	4.5	Weight	1.0 g



Angle piece with cone adapter

626107-6020-506

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	43.5 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm

Weight9.5 g

Connection Typ...M5



Angle block short, ThermoFit Pro system

626107-6021-030


Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	30.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Angle block short, ThermoFit Pro system

626107-6021-052


Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	270.0 °	Angle 2 (W2)	30.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Angle piece with cone adapter

626107-6020-040

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	40.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle block long, ThermoFit Pro system

626107-6022-169


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	20.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Double angle piece with cone adapter, M5

626107-6023-024


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	45.0 °	Angle 2 (W2)	- 36.2 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Counterweight for stylus systems

626105-6270-005


Product Type	Counterweight	Length (L)	19.9 mm
Material	Stainl. St.	Connection Type	M5
Application	Connect	Ø Body (DG)	25.0 mm
Weight	75.0 g		



Cube, M3 XXT 6 sided

626103-6110-006


Product Type	Cube	Length (L)	12.0 mm
Angle 1 (W1)	60.0 °	Material	Titanium
Connection Type	M3 XXT	Application	Connect
Ø Body (DG)	12.0 mm	Width (B)	5.0
Weight	1.8 g	Connection Typ...	M3 XXT



Angle piece with cone adapter

626103-6020-045

Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	45.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT



Offset rotating knuckle joint, M3


602030-9102-000

Product Type	Rotary Elements	Length (L)	12.0 mm
Connection Type	M3	Application	Connect
Width (B)	6.0	Weight	3.0 g



626107-6022-741

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	227.0 °	Angle 2 (W2)	36.4 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle block long, ThermoFit Pro system

626107-6022-166

Product Type	Angle	Length (L)	43.0 mm
--------------	-------	------------	---------


Angle 1 (W1)	180.0 °	Angle 2 (W2)	20.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle block long, W1 180,0-W2 009,8 The

626107-6022-728


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	9.8 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Cube, with cone adapter, 4 sided M5

626107-6280-070

Product Type	Cube	Length (L)	17.5 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Connect	Ø Body (DG)	11.0 mm
Width (B)	15.0	Weight	13.0 g



Rotary joint, M5 with 4 sided cube

626105-6280-080

Product Type	Stylus Holder	Length (L)	32.5 mm
Angle 1 (W1)	90.0 °	Connection Type	M5
Measurement L...	25.0 mm	Application	Connect
Ø Body (DG)	11.0 mm	Width (B)	15.0
Weight	18.0 g	Connection Typ...	M5



Angle block short, ThermoFit Pro system

626107-6021-181

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	15.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g




Angle block short, ThermoFit Pro system

626107-6021-675

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	7.5 °
Material	Titanium	Connection Type	M5 Pro


Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Angle block short, ThermoFit Pro system

626107-6021-046

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	10.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Single angle, M5

626105-6020-010


Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	10.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Angle piece with cone adapter

626107-6020-496

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	11.1 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Screw, M5 for ThermoFit cube

626107-6060-002

Product Type	Screw	Length (L)	30.0 mm
Material	Stainl. St.	Connection Type	M5 Pro
Measurement L...	25.0 mm	Application	Connect
Weight	5.2 g		



Angle block short, ThermoFit Pro system

626107-6021-668

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	30.0 °	Angle 2 (W2)	45.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Angle piece with cone adapter

626107-6020-503

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	33.6 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle piece with cone adapter

626107-6020-497

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	66.8 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle piece with cone adapter

626107-6020-485

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	83.9 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Double angle piece with cone adapter, M5


626107-6023-027

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	69.0 °	Angle 2 (W2)	- 69.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g

265 products

Sort results
Recommended


Change view



Knuckle joint, M5 11 mm

600342-9002-000


Product Type	Rotary Elements	Length (L)	30.0 mm
Material	Titanium	Connection Type	M5
Application	Connect	Ø Body (DG)	11.0 mm
Weight	11.0 g	Connection Typ...	M5



Screw, M5 for 22 mm Cube

626109-0017-000

Product Type	Screw	Length (L)	27.0 mm
Material	Stainl. St.	Connection Type	M5
Measurement L...	22.0 mm	Application	Connect
Weight	4.0 g		



Angle block short, ThermoFit Pro system

626107-6021-198


Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	270.0 °	Angle 2 (W2)	15.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Double angle piece with cone adapter, M5

626107-6023-025

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	10.7 °	Angle 2 (W2)	115.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle piece with cone adapter

626107-6020-035

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	35.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle block short, ThermoFit Pro system

626107-6021-670

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	26.3 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Angle piece with cone adapter

626107-6020-500

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	63.7 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle piece with cone adapter

626107-6020-504


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	42.4 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle block long, W1 088,9-W2 035,9 The

626107-6022-731

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	88.9 °	Angle 2 (W2)	35.9 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Cube, M5 Titanium 20 mm

600341-8002-000

Product Type	Cube	Length (L)	20.0 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	M5	Measurement L...	10.0 mm
Application	Connect	Width (B)	20.0
Weight	32.0 g	Connection Typ...	M5



Double angle piece with cone adapter, M5

626107-6023-009


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	90.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle piece with cone adapter

626103-6020-118

Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	6.5 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT



Rotating knuckle joint, M2

626112-5000-004

Product Type	Rotary Elements	Length (L)	21.0 mm
Connection Type	M2	Application	Connect
Ø Body (DG)	4.0 mm	Weight	2.0 g



Fixturing system for blank angle block


626107-6060-008

Product Type	Angle	Material	Steel
Connection Type	Cone Receiver	Application	Prepare



626107-6022-758

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	309.7 °	Angle 2 (W2)	38.1 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle block short, ThermoFit Pro system

626107-6021-315

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	45.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle

Ø Body (DG)

20.0 mm

Weight

17.0 g



Angle piece with cone adapter

626107-6020-487


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	84.2 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle piece with cone adapter

626107-6020-507


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	21.8 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Knuckle joint, M5 20 mm

626105-6280-070

Product Type	Rotary Elements	Length (L)	36.0 mm
Material	Titanium	Connection Type	M5
Application	Connect	Ø Body (DG)	20.0 mm
Weight	43.0 g	Connection Typ...	M5



Counterweight for stylus systems

626105-6270-009


Product Type	Counterweight	Length (L)	7.3 mm
Material	Stainl. St.	Connection Type	M5
Application	Connect	Ø Body (DG)	25.0 mm
Weight	25.0 g		



Clamping Screw, M3 XXT

626103-6110-004

Product Type	Screw	Length (L)	8.0 mm
Connection Type	M3 XXT	Application	Connect
Ø Body (DG)	3.5 mm		



Angle block long, ThermoFit Pro system

626107-6022-232

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	5.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Blank Double Angle block with cone adapter

626107-6023-000


Product Type	Angle	Length (L)	22.0 mm
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	18.0 g
Connection Typ...	M5		



Angle piece with cone adapter

626107-6020-491


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	3.2 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Counterweight for stylus systems

626105-6270-004

Product Type	Counterweight	Length (L)	13.69 mm
Material	Stainl. St.	Connection Type	M5
Application	Connect	Ø Body (DG)	25.0 mm
Weight	50.0 g		



Adapter, M5 bolt, M2 drill hole

602030-0215-000


Product Type	Adapter	Length (L)	10.0 mm
Material	Stainl. St.	Connection Type	M5
Application	Connect	Ø Body (DG)	11.0 mm
Weight	5.0 g	Connection Typ...	M2



Angle piece with cone adapter

626103-6020-117

Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	40.5 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT



cube, M3XXT, 90 degree, single

626103-6110-001


Product Type	Cube	Length (L)	6.5 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	M3 XXT	Application	Connect
Width (B)	5.0	Weight	0.6 g
Connection Typ...	M3 XXT		



Angle block short, ThermoFit Pro system

626107-6021-220

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	10.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Cube, M5 6 sided, Aluminum

626105-6010-002


Product Type	Cube	Angle 1 (W1)	60.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Ø Body (DG)	34.6 mm
Width (B)	20.0	Weight	51.4 g
Connection Typ...	M5		



Angle block short, ThermoFit Pro system

626107-6021-177


Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	20.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Cube, M3 XXT 4 sided

626103-6110-003


Product Type	Cube	Length (L)	13.0 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	M3 XXT	Application	Connect
Width (B)	5.0	Weight	1.8 g
Connection Typ...	M3 XXT		



Cube, M5 Aluminum 20 mm

602030-8362-000


Product Type	Cube	Length (L)	20.0 mm
Angle 1 (W1)	90.0 °	Material	Aluminum
Connection Type	M5	Measurement L...	10.0 mm
Width (B)	20.0	Weight	20.0 g
Connection Typ...	M5		



Star element, 5 x DS 1.5

600341-8368-000

Product Type	Stylus Holder	Length (L)	10.0 mm
Connection Type	M5	Measurement L...	3.0 mm
Ø Shaft (DS)	1.5 mm	Application	Tactile
Ø Body (DG)	11.0 mm	Weight	5.0 g
Connection Typ...	Without thread		



Angle piece with cone adapter

626103-6020-055


Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	55.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT



Angle block long, ThermoFit Pro system

626107-6022-064


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	10.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Double angle piece with cone adapter, M5

626107-6023-012


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	40.0 °	Angle 2 (W2)	- 40.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Adapter, M5 for ball disk

626105-6271-001


Product Type	Position	Material	Steel
Shaft Material	Steel	Connection Type	M5
Ø Shaft (DS)	8.0 mm	Application	Connect
Weight	6.0 g		



Angle block short, ThermoFit Pro system

626107-6021-179

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	15.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Angle piece with cone adapter

626103-6020-025

Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	25.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT



Angle piece with cone adapter

626107-6020-490

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	86.4 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Double angle piece with cone adapter, M5

626107-6023-007

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	75.0 °	Angle 2 (W2)	- 75.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle block long, W1 311,0-W2 036,4 The

626107-6022-742


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	311.0 °	Angle 2 (W2)	36.4 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle block short, ThermoFit Pro system

626107-6021-024

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	90.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Knuckle joint with cone adapter

626103-6180-021


Product Type	Rotary Elements	Length (L)	12.0 mm
Connection Type	M3 XXT	Application	Connect
Ø Body (DG)	5.0 mm	Weight	1.0 g



Angle piece with cone adapter

626107-6020-494

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	39.3 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Rotary joint, M3 XXT

626103-6180-010


Product Type	Rotary Elements	Length (L)	11.0 mm
Connection Type	M3 XXT	Application	Connect
Ø Body (DG)	5.0 mm	Weight	1.0 g



Double angle piece with cone adapter, M5

626107-6023-016

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	5.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle block long, ThermoFit Pro system

626107-6022-162

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	45.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle piece with cone adapter

626103-6020-021


Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	21.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT



Angle block long, W1 090,0-W2 006,0 The

626107-6022-736


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	6.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle block short, ThermoFit Pro system

626107-6021-054

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	270.0 °	Angle 2 (W2)	90.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Blank angle block short, ThermoFit Pro System

626107-6021-000

Product Type	Angle	Length (L)	25.0 mm
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle


Ø Body (DG)	20.0 mm	Weight	18.0 g
Connection Typ...	M5		



Angle block long, ThermoFit Pro system

626107-6022-262


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	270.0 °	Angle 2 (W2)	5.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Counterweight for stylus systems

626105-6270-003


Product Type	Counterweight	Length (L)	26.6 mm
Material	Stainl. St.	Connection Type	M5
Application	Connect	Ø Body (DG)	25.0 mm
Weight	100.0 g		



Angle piece, M5

626105-6020-025

Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	25.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Angle piece, M5

626105-6020-090


Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	90.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Rotary joint, M5 with Star element 4 X DS 1

626105-6280-050

Product Type	Stylus Holder	Length (L)	25.0 mm
Connection Type	M5	Ø Shaft (DS)	1.0 mm
Stylus Type	Stylus Holder	Application	Connect
Ø Body (DG)	11.0 mm	Weight	11.0 g
Connection Typ...	Without thread		



Angle piece with cone adapter

626107-6020-020


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	20.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle block short, ThermoFit Pro system

626107-6021-060

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	60.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Cube, M2

602030-8381-000


Product Type	Star Element	Length (L)	7.0 mm
Connection Type	M2	Application	Connect
Ø Body (DG)	3.0 mm	Width (B)	8.0
Weight	1.0 g	Connection Typ...	M2



Angle block short, ThermoFit Pro system

626107-6021-100


Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	60.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Angle block short, ThermoFit Pro system

626107-6021-074

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	10.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g

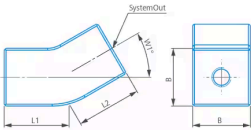

Angle piece, M5

626105-6020-015


Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	15.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Angle block long, W1 308,3-W2 036,9 The

626107-6022-751


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	308.3 °	Angle 2 (W2)	36.9 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Screw, M5 for 20 mm Cube

626109-0016-000


Product Type	Screw	Length (L)	25.0 mm
Material	Stainl. St.	Connection Type	M5
Measurement L...	20.0 mm	Application	Connect
Weight	3.0 g		



Swiveling Pivot, single styli holder Styli not included


600341-8180-000

Product Type	Stylus Holder	Length (L)	40.0 mm
Connection Type	M5	Measurement L...	22.0 mm
Application	Tactile	Ø Body (DG)	11.0 mm
Width (B)	6.0	Weight	15.0 g
Connection Typ...	Without thread		



Screw, M5 for stylus disk


600341-0212-000



Cube, M5 Titanium 15 mm with removeable screw

626115-6110-001

Product Type	Cube	Length (L)	15.0 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	M5	Measurement L...	7.5 mm
Application	Connect	Width (B)	15.0
Weight	13.0 g	Connection Typ...	M5



Angle block short, ThermoFit Pro system

626107-6021-232

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	30.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Screw, M5 for 15 mm Cube

626109-0015-000

Product Type	Screw	Length (L)	20.0 mm
Material	Stainl. St.	Connection Type	M5
Measurement L...	15.0 mm	Application	Connect
Weight	3.0 g		



Angle piece with cone adapter

626107-6020-489

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	58.5 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Blank Angle block with cone adapter

626103-6020-000

Product Type	Angle	Length (L)	7.75 mm
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	1.0 g	Connection Typ...	M3 XXT



Double angle piece with cone adapter, M5

626107-6023-021


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	8.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Double angle piece with cone adapter, M5

626107-6023-022


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	- 9.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Cube, with cone adapter, 6 sided M3

626107-6280-100

Product Type	Star Element	Length (L)	10.0 mm
Angle 1 (W1)	60.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	5.0 mm
Application	Connect	Ø Body (DG)	11.0 mm
Width (B)	14.0	Weight	5.0 g



Angle piece, M5

626105-6020-080


Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	80.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Angle piece with cone adapter

626107-6020-495


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	82.7 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Rotary joint, M5 11 mm

626105-6280-020

Product Type	Rotary Elements	Length (L)	20.0 mm
Material	Titanium	Connection Type	M5
Application	Connect	Ø Body (DG)	11.0 mm
Weight	7.2 g	Connection Typ...	M5



Knuckle joint, M2

602030-9105-000

Product Type	Rotary Elements	Length (L)	16.5 mm
Connection Type	M2	Application	Connect
Ø Body (DG)	4.0 mm	Weight	2.0 g



Angle block short, ThermoFit Pro system

626107-6021-228

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	270.0 °	Angle 2 (W2)	60.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Double angle piece with cone adapter, M5

626107-6023-026

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	- 9.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Double angle piece with cone adapter, M5

626107-6023-031

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	90.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle block short, ThermoFit Pro system

626107-6021-682

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	252.5 °	Angle 2 (W2)	62.8 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Angle block long, ThermoFit Pro system

626107-6022-008

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	270.0 °	Angle 2 (W2)	15.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Double angle piece with cone adapter, M5

626107-6023-002

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	- 45.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle piece with cone adapter

626107-6020-097


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	97.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle piece with cone adapter

626107-6020-508

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	21.4 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle piece with cone adapter

626103-6020-030


Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	30.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT



Angle piece with cone adapter

626107-6020-498


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	55.6 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Cube, M5 8 sided, Titanium

626105-6110-000


Product Type	Cube	Angle 1 (W1)	45.0 °
Material	Titanium	Connection Type	M5
Application	Connect	Ø Body (DG)	29.0 mm
Width (B)	15.0	Weight	39.6 g
Connection Typ...	M5		



Cube, M5 Aluminum 15 mm

602030-8363-000


Product Type	Cube	Length (L)	15.0 mm
Angle 1 (W1)	90.0 °	Material	Aluminum
Connection Type	M5	Measurement L...	7.5 mm
Application	Connect	Width (B)	15.0
Weight	7.9 g	Connection Typ...	M5



Double angle piece with cone adapter, M5

626107-6023-015


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	10.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Double angle piece with cone adapter, M3

626107-6023-010


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	45.0 °	Angle 2 (W2)	- 45.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Screw, M5 for stylus disk

600341-0211-000


Product Type	Screw	Length (L)	30.0 mm
Material	Stainl. St.	Connection Type	M5
Measurement L...	21.0 mm	Application	Connect
Weight	9.0 g		



Cube, M5 6 sided, 30 ° incline, Titanium

626105-6110-031


Product Type	Cube	Angle 1 (W1)	30.0 °
Material	Titanium	Connection Type	M5
Application	Connect	Ø Body (DG)	34.0 mm
Width (B)	15.0	Weight	47.0 g
Connection Typ...	M5		



knuckle joint with cone adapter

626107-6280-040


Product Type	Knuckle Element	Length (L)	19.0 mm
Material	Titanium	Connection Type	Cone Adapter
Application	Connect	Ø Body (DG)	11.0 mm
Weight	11.2 g	Connection Typ...	M5



Cube, M5 Titanium 15 mm

600341-8361-000

Product Type	Cube	Length (L)	15.0 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	M5	Measurement L...	7.5 mm
Application	Connect	Width (B)	15.0
Weight	13.0 g	Connection Typ...	M5



Counterweight for stylus systems

626105-6270-006

Product Type	Counterweight	Length (L)	39.3 mm
Material	Stainl. St.	Connection Type	M5
Application	Connect	Ø Body (DG)	25.0 mm
Weight	150.0 g		



Angle piece with cone adapter

626107-6020-488

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	97.7 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle piece with cone adapter

626107-6020-502


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	29.4 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle piece with cone adapter

626107-6020-092


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	92.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Angle block long, ThermoFit Pro system

626107-6022-164


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	270.0 °	Angle 2 (W2)	45.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle piece, M5

626105-6020-045


Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	45.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Angle piece, M5

626105-6020-070


Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	70.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Angle piece with cone adapter

626103-6020-090

Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT



Angle block short, ThermoFit Pro system

626107-6021-064

Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	20.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Angle block long, ThermoFit Pro system

626107-6022-257

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	20.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g




Screws for cone receiver, (6) M3 XXT

626119-0001-041

Product Type	Screw	Connection Type	M3 XXT
--------------	-------	-----------------	--------

Application Connect



Adapter, M5 bolt, M3 (XXT) drill hole

602030-0315-000


Product Type	Adapter	Length (L)	10.0 mm
Material	Stainl. St.	Connection Type	M5
Application	Connect	Ø Body (DG)	11.0 mm
Weight	5.0 g	Connection Typ...	M3



Double angle piece with cone adapter, M5

626107-6023-023

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	73.0 °	Angle 2 (W2)	- 73.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle piece, M5

626105-6020-035


Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	35.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Angle piece with cone adapter

626103-6020-039


Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	39.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT



Angle piece, M5

626105-6020-075

Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	75.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Angle block long, ThermoFit Pro system

626107-6022-030


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	30.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Rotary joint, M5 with Star element 4 X DS 1.5

626105-6280-120

Product Type	Stylus Holder	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Connection Type	M5
Ø Shaft (DS)	1.5 mm	Application	Connect
Ø Body (DG)	11.0 mm	Weight	11.0 g
Connection Typ...	Without thread		



Rotating knuckle joint, M3 XXT


626103-6180-020

Product Type	Rotary Elements	Length (L)	19.0 mm
Connection Type	M3 XXT	Application	Connect
Ø Body (DG)	5.0 mm	Weight	1.0 g



626107-6022-734

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	270.0 °	Angle 2 (W2)	26.6 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle block long, ThermoFit Pro system

626107-6022-201

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	10.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement Lengt...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle piece with cone adapter

626107-6020-486


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	75.5 °	Material	Titanium
Connection Type	Cone Adapter	Measurement Lengt...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Type Out	M5



Double angle piece with cone adapter, M5

626107-6023-014

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	9.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement Length...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Double angle piece with cone adapter, M5

626107-6023-017


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	78.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement Length...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle block long, W1 230,3-W2 038,1 The

626107-6022-755


Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	230.3 °	Angle 2 (W2)	38.1 °
Material	Titanium	Connection Type	M5 Pro
Measurement Length...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle piece, M5

626105-6020-020

Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	20.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Type Out	M5



Star element with cone adapter, 4 x DS 1.5

626103-6180-004


Product Type	Star Element	Length (L)	4.7 mm
Angle 1 (W1)	120.0 °	Connection Type	M3 XXT
Measurement Length...	2.5 mm	Ø Shaft (DS)	1.5 mm
Application	Connect	Ø Body (DG)	5.0 mm
Width (B)	7.9	Weight	2.0 g



Angle piece with cone adapter

626107-6020-492

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	70.3 °	Material	Titanium
Connection Type	Cone Adapter	Measurement Leng...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Type Out	M5



Angle piece, M5

626105-6020-060

Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	60.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Type Out	M5



Angle block short, ThermoFit Pro system

626107-6021-692


Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	7.2 °
Material	Titanium	Connection Type	M5 Pro
Measurement Leng...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Set of screws, M5 for stylus holder

626119-0001-046


Product Type	Screw	Connection Type	M5
Application	Connect		



Angle piece with cone adapter

626103-6020-015


Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	15.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement Leng...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Type Out	M3 XXT



Adapter, M5 for ball disk

626105-6271-002


Product Type	Position	Material	Steel
Shaft Material	Steel	Connection Type	M5
Ø Shaft (DS)	16.0 mm	Application	Connect
Weight	10.0 g		



Angle piece with cone adapter

626107-6020-025


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	25.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement Leng...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Type Out	M5



Screw, M5 for stylus disk

600341-0210-000

Product Type	Screw	Length (L)	35.0 mm
Material	Stainl. St.	Connection Type	M5
Measurement Length...	26.0 mm	Application	Connect
Weight	9.0 g		



Adapter, M2 bolt, M3 drill hole

000000-1049-178

Product Type	Adapter	Length (L)	7.0 mm
Material	Stainl. St.	Connection Type	M2
Application	Connect	Ø Body (DG)	4.0 mm
Weight	0.4 g	Connection Type Out	M3



Double angle piece with cone adapter, M5

626107-6023-032

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	40.0 °	Angle 2 (W2)	- 50.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement Length...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



626107-6022-752

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	231.7 °	Angle 2 (W2)	36.9 °
Material	Titanium	Connection Type	M5 Pro
Measurement Length...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g




NO IMAGE AVAILABLE

Adapter, M3 XXT bolt, M2 drill hole

626170-0002-715


Product Type	Adapter	Length (L)	9.0 mm
Material	Titanium	Connection Type	M3 XXT
Application	Connect	Ø Body (DG)	5.0 mm
Weight	1.0 g	Connection Type Out	M2



Star element with cone adapter, 6 X DS 1

626107-6280-130


Product Type	Star Element	Length (L)	10.0 mm
Angle 1 (W1)	60.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement Length (L)	7.0 mm
Ø Shaft (DS)	1.0 mm	Application	Connect
Ø Body (DG)	11.0 mm	Weight	5.1 g



Angle piece with cone adapter

626107-6020-060


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	60.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement Length (L)	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Type Out	M5



Angle piece with cone adapter

626107-6020-045


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	45.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement Length (L)	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Type Out	M5



Angle block long, ThermoFit Pro system

626107-6022-026

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	180.0 °	Angle 2 (W2)	45.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement Length...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle piece with cone adapter

626103-6020-040

Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	40.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement Length...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Type Out	M3 XXT


CMM Connection Elements

Connecting elements are indispensable for the construction of probe systems. ZEISS offers products for all applications, from cubes, angle and star elements to screws and counterweights. Here you will find everything you need for a highly effective probe system. All products of the ZEISS connecting element family are technically coordinated and scalable. Here too, ZEISS guarantees the highest manufacturing quality and therefore maximum performance.

265 products

Sort results
Recommended


Change view



Star element with cone adapter, 4 X DS 2

626107-6280-120

Product Type	Star Element	Length (L)	10.0 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	7.0 mm
Ø Shaft (DS)	2.0 mm	Application	Connect
Ø Body (DG)	11.0 mm	Weight	4.0 g



Rotary joint, M5 11 mm

626105-6280-030

Product Type	Rotary Elements	Length (L)	30.0 mm
Material	Titanium	Connection Type	M5
Application	Connect	Ø Body (DG)	11.0 mm
Weight	11.33 g	Connection Typ...	M5




Angle block long, ThermoFit Pro system

626107-6022-226

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	10.0 °
Material	Titanium	Connection Type	M5 Pro

Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Angle piece with cone adapter

626103-6020-035


Product Type	Angle	Length (L)	7.75 mm
Angle 1 (W1)	35.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	4.0 mm
Application	Angle	Ø Body (DG)	5.0 mm
Weight	0.82 g	Connection Typ...	M3 XXT



Angle block long, ThermoFit Pro system

626107-6022-202

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	90.0 °	Angle 2 (W2)	15.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Double angle piece with cone adapter, M5

626107-6023-028

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	65.0 °	Angle 2 (W2)	- 65.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	40.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	30.0 °
Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5



Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	45.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g

Angle block short, ThermoFit Pro system

626107-6021-045


Product Type	Angle	Length (L)	25.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	45.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	17.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	17.0 g



Clamping Screw with female thread, M3 XXT

626103-6110-005


Product Type	Screw	Length (L)	8.0 mm
Connection Type	M3 XXT	Application	Connect
Ø Body (DG)	4.0 mm		



End angle piece, rotating , M5

626105-6280-010


Product Type	Angle	Length (L)	30.5 mm
Angle 1 (W1)	90.0 °	Connection Type	M5
Measurement L...	25.0 mm	Application	Connect
Ø Body (DG)	11.0 mm	Weight	9.0 g
Connection Typ...	M5		



Rotary piece with cone adapter

626103-6180-011

Product Type	Rotary Elements	Length (L)	4.0 mm
Connection Type	M3 XXT	Application	Connect
Ø Body (DG)	5.0 mm	Weight	1.0 g



Rotating Knuckle joint, M5, 11 mm

626105-6280-040

Product Type	Rotary Elements	Length (L)	40.0 mm
Material	Titanium	Connection Type	M5
Application	Connect	Ø Body (DG)	11.0 mm
Weight	16.0 g	Connection Typ...	M5



Angle block long, ThermoFit Pro system

626107-6022-060

Product Type	Angle	Length (L)	43.0 mm
Angle 1 (W1)	0.0 °	Angle 2 (W2)	60.0 °
Material	Titanium	Connection Type	M5 Pro
Measurement L...	35.0 mm	Application	Angle
Ø Body (DG)	20.0 mm	Weight	24.0 g



Rotary joint, M5 with M3 XXT star element

626105-6280-060


Product Type	Star Element	Length (L)	25.0 mm
Angle 1 (W1)	90.0 °	Material	Titanium
Connection Type	M5	Measurement L...	20.0 mm
Application	Connect	Ø Body (DG)	11.0 mm
Width (B)	13.0	Weight	10.0 g



Angle piece with cone adapter

626107-6020-505


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	16.7 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Double angle piece with cone adapter, M5

626107-6023-020

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	49.0 °	Angle 2 (W2)	- 49.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Cube, M3 4 sided

602030-8382-000

Product Type	Star Element	Length (L)	11.5 mm
Connection Type	M3	Application	Connect
Ø Body (DG)	4.0 mm	Width (B)	12.0
Weight	4.0 g		



Cube, M2 Stainless Steel

602030-9104-000


Product Type	Star Element	Length (L)	9.0 mm
Material	Stainl. St.	Connection Type	M2
Application	Connect	Ø Body (DG)	10.5 mm
Weight	3.9 g	Connection Typ...	M2



Set of screws, M5 for cone receiver M5

626119-0001-019

Product Type	Screw	Connection Type	M5
Application	Connect		



Angle piece with cone adapter

626107-6020-030


Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	30.0 °	Material	Titanium
Connection Type	Cone Adapter	Measurement L...	10.0 mm
Application	Angle	Ø Body (DG)	11.0 mm
Weight	9.5 g	Connection Typ...	M5



Double angle piece with cone adapter, M5

626107-6023-030

Product Type	Angle	Length (L)	16.0 mm
Angle 1 (W1)	52.0 °	Angle 2 (W2)	- 18.0 °
Material	Titanium	Connection Type	Cone Adapter
Measurement L...	10.0 mm	Application	Angle
Ø Body (DG)	11.0 mm	Weight	16.5 g



Angle piece, M5

626105-6020-065

Product Type	Angle	Length (L)	15.0 mm
Length 1 (L1)	15.0 mm	Angle 1 (W1)	65.0 °

Material	Aluminum	Connection Type	M5
Application	Connect	Width (B)	12.0
Weight	11.0 g	Connection Typ...	M5

CMM Adapter Plates



Avoid incorrect measurements and incorrect operation

With an integrated ID chip in the measuring software, ZEISS adapter plates identify the stylus system and thus prevent operating errors and incorrect measurements.

Another exclusive advantage: With the ZEISS adapter plates, more information such as measuring force or angle of the active probe system is available on the ZEISS control panel display. Adapter plates are specifically engineered to suit ZEISS sensors: ZEISS VAST, VAST XXT, XTR, RDS or ST/ST3.



Accelerate stylus change and measuring time

Only ZEISS original adapter plates will support features such as a Quick Change and FlyScan to shorten your inspection time.

The Quick Change function allows you to perform stylus system changes up to 60% faster, thus saving you up to 14 seconds per stylus change. This is more impactful for complex workpieces that require several stylus changes.

The FlyScan function allows the stylus to move over a recess gap and continue scanning on the other side without interruption while software evaluates the correct measuring points. Depending on the workpiece, this process can save up to 70% of the measuring time.

Note: for accuracy reasons and system compatibility, these performance optimizations are only possible with original ZEISS adapter plates.

CMM Adapter Plates

The adapter plate is an important interface between the CMM and the workpiece. Particularly at the measuring sensor, no compromises should be made. ZEISS adapter plates are manufactured exclusively by ZEISS in Germany under strict quality testing and procedures. Laboratory approvals and constant quality and process control guarantee full functionality on all ZEISS CMMs.

[Learn more about CMM Adapter Plates](#)



ZEISS VAST/VAST Gold

Adapter plates for the VAST/VAST Gold sensor with activated chip functions and M5 connection thread



ZEISS VAST XTR

Adapter plates for the VAST XTR sensor have additional bearing seats to allow the rotation function of the plate. Connection thread is M5



VAST XXT

Adapter plates for the VAST XXT sensor are significantly smaller and lighter than other adapter plates. Connecting thread is M3



Accessories for Adapter Plates

Accessories for adapter plates to protect and identify sensitive stylus systems and to extend functionality

Checks and reference bodies

Artifacts are used for standard-compliant calibration, qualification test pieces help ensure the correct configuration of the device in everyday use. We offer both, together with well thought-out mounts. Calibration can also be booked as a service for all reference standards.

8 products

Sort results

Recommended

Change view



XRM Check, calibrated

626106-9340-010

Product Type	Artifacts	Application	Check
Machine			
X-RADIA Versa			



METROTOM Check Set G1

626106-9211-000


Product Type	Artifacts	Application	Check
Machine			
METROTOM 1500 G1			



METROTOM Check Set nano

626106-9340-030

Product Type	Artifacts	Application	Check
Machine			
METROTOM 1500, METROTOM 80...			



METROTOM Check Set G2

626106-9212-000


Product Type	Artifacts	Application	Check
Machine			
METROTOM 1500 G2			



METROTOM Check Set micro

626106-9310-000

Product Type	Artifacts	Application	Check
Machine			
METROTOM 800, METROTOM 6 s...			



METROTOM Check Set G3

626106-9215-000

Product Type	Artifacts	Application	Check
Machine			
METROTOM 1500 G3, METROTOM 1			



Measuring wire specimen set for METROTOM 1500

626106-9200-000

Product Type	Wire Artifact	Application	Tomographic
Machine			
METROTOM 1500			



METROTOM P-Check

626106-9214-000

Product Type	Artifacts	Application	Check
Machine			
METROTOM 1500, METROTOM 80...			

Assistance

Tools support the use of the devices. A distinction is made between tools for setting up the machine and tools used within the machine.

1 products

Sort results
Recommended

Change view



Filaments for METROTOM 6 scout
000250-0006-502

Machine
METROTOM 6 scout

Storage and Set-Up

Coordinate measuring machines and their accessories are valuable equipment that must be maintained and cared for. Probe and pallet cabinets, for example, serve as optimized storage facilities and their customized extras. Setting devices can be used to adjust or simulate probe systems in advance.

30 products

Sort results

Recommended

Change view



RDS Probe holder
626100-8014-000

Product Type	Probe Sockets	Material	Plastic
Connection Type	RDS	Application	Store




Desktop sensor rack, 4 holders VAST XXT
626119-0003-000

Product Type	Probe Sockets	Connection Type	M3 XXT
Application	Store		



FixAssist®, XXT Alignment Pin
626109-9140-120

Measuring Sensor	VAST XXT	Product Type	Set-up Device
Application	Prepare		



Set of 5 XXT probe holders for probe cabinet

626100-9023-110

Product Type	Probe Sockets	Connection Type	M3 XXT
Application	Store		



ST/ST3 Probe holder

626100-8012-000

Product Type	Probe Sockets	Material	Plastic
Connection Type	ST/ST3	Application	Store



Glass door probe cabinet

626100-9015-100

Product Type	Probe Cabinet	Application	Store
--------------	---------------	-------------	-------

Storage and Set-Up


Coordinate measuring machines and their accessories are valuable equipment that must be maintained and cared for. Probe and pallet cabinets, for example, serve as optimized storage facilities and their customized extras. Setting devices can be used to adjust or simulate probe systems in advance.

30 products

Sort results

Recommended

Change view



Tool tray for probe cabinet
626100-8022-000

Product Type	Tray	Material	Plastic
Application	Store		



VAST FixAssist®
626109-9120-100

Measuring Sensor	VAST/MT	Product Type	Set-up Device
Application	Prepare	Weight	19.15 g



Stylus Storage for ScanMax
609489-0000-000

Product Type	Probe Sockets	Application	Store
--------------	---------------	-------------	-------



Pallet cabinet (large)

626109-9222-300

Product Type	Pallet Cabinet	Application	Store
--------------	----------------	-------------	-------



FixAssist®, XXT Adapter S1

626109-9140-160

Measuring Sensor	VAST XXT	Product Type	Set-up Device
Application	Prepare		



Compact XXT Multi Sensor Cabinet

626100-9023-000

Product Type	Probe Cabinet	Material	Steel
Connection Type	M3 XXT	Application	Store



DSE Probe holder

626100-8013-000

Product Type	Probe Sockets	Material	Plastic
Connection Type	DSE	Application	Store



XTR FixAssist®

626109-9160-100

Measuring Sensor	VAST XTR	Product Type	Set-up Device
Application	Prepare		



XTR Probe holder

626100-8011-020

Product Type	Probe Sockets	Material	Plastic
Connection Type	VAST XTR	Application	Store



FixAssist®, XXT Adapter Knuckle

626109-9140-300

Measuring Sensor	VAST XXT	Product Type	Set-up Device
Application	Prepare		



Probe cabinet with 16 XXT probe holders

626100-9026-000

Product Type	Probe Cabinet	Connection Type	M3 XXT
Application	Store		



Storage - diaphragm capsule 200x100x50 mm

626119-0010-013

Product Type	Diaphragm Cap...	Material	Plastic
Application	Protect		



Probe cabinet with 30 MT/VAST probe holders

626100-9025-000

Product Type	Probe Cabinet	Connection Type	MT/VAST
Application	Store		



Probe cabinet

626100-9015-000

Product Type	Probe Cabinet	Application	Store
--------------	---------------	-------------	-------



FixAssist®, VAST Set-up device for knuckle joints
DG11 DG20

626109-9170-000

Measuring Sensor	VAST/MT	Product Type	Set-up Device
Application	Prepare		



Pallet cabinet (small)

626109-9222-200

Product Type	Pallet Cabinet	Application	Store
--------------	----------------	-------------	-------



Additional level for probe cabinet

626100-8024-000

Product Type	Level	Application	Secure
--------------	-------	-------------	--------



XXT FixAssist®

626109-9140-200

Measuring Sensor	VAST XXT	Product Type	Set-up Device
Application	Prepare		



XXT Probe holder

626100-8015-000

Product Type	Probe Sockets	Material	Plastic
Connection Type	M3 XXT	Application	Store



Storage - diaphragm capsule 100x75x25 mm

626119-0010-011

Product Type	Diaphragm Cap...	Material	Plastic
Application	Protect		



VAST Probe holder

626100-8011-010

Product Type	Probe Sockets	Material	Plastic
Connection Type	MT/VAST	Application	Store



Glass door probe cabinet with 30 MT/VAST probe holders

626100-9025-100


Product Type	Probe Cabinet	Connection Type	MT/VAST
Application	Store		



Shelf for probe cabinet

626100-8023-000

Product Type	Shelf	Application	Store
--------------	-------	-------------	-------



Pallet for M5 styli

626100-8021-000

Product Type	Probe Sockets	Material	Aluminum
Connection Type	M5	Application	Store

131 products

Sort results
Recommended

Change view



Contour Arm

000000-1433-383

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Angle 1 (W1)	55.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9259-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exte...
Application	Extend		



Contour Arm

000000-1794-623

Measuring Sensor	Contourecord	Product Type	Stylus Arm
------------------	--------------	--------------	------------

Length (L)	178.5 mm	Length 1 (L1)	52.0 mm
Application	Tactile		



Contour Arm

625006-9246-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Ext...
Length (L)	73.0 mm	Application	Extend



Contour Arm

000000-1054-833

Measuring Sensor	Surfcom Flex, 1...	Product Type	Surface Stylus
Length (L)	73.0 mm	Length 1 (L1)	5.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9139-000

Product Type	Stylus Tip	Stylus Tip Geo...	Pointer
--------------	------------	-------------------	---------

Application

Tactile



Contour Arm

000000-1433-393

Measuring Sensor	Surfcom 2000	Product Type	Contour Stylus
Application	Tactile		



Contour Arm

000000-1794-624

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	26.0 mm
Application	Tactile		



Contour Arm

000000-0483-889

Measuring Sensor	Surfcom 3000/5...	Product Type	Surface Stylus
LH	130.0 mm	LV	- 21.5 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.

Stylus Tip Geo...	Blade	Application	Tactile
-------------------	-------	-------------	---------



Contour Arm

625006-9252-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

625006-3093-000

Product Type	Stylus Tip	Length (L)	34.0 mm
Length 1 (L1)	26.0 mm	Angle 1 (W1)	12.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		

131 products

Sort results
Recommended

Change view



Contour Arm

000000-1458-687

Measuring Sensor	Surfcom 2000	Product Type	Stylus Tip
Length (L)	21.0 mm	Length 1 (L1)	16.0 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Ruby
Application	Tactile		



Contour Arm

000000-1079-359

Measuring Sensor	Surfcom Flex, 1...	Product Type	Surface Stylus
Length (L)	33.5 mm	Length 1 (L1)	0.9 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9251-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-4030-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Extende...
Length (L)	65.0 mm	Application	Extend



Contour Arm

000000-1433-387

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3095-000

Product Type	Stylus Tip	Length (L)	60.0 mm
Length 1 (L1)	52.0 mm	Angle 1 (W1)	24.0 °

Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm
625006-3338-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Application	Tactile		



Contour Arm
625006-9427-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm
625006-9249-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
------------------	-----------------	--------------	------------



Contour Arm

625006-3251-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Extensi...
Length (L)	65.0 mm	Length 1 (L1)	12.0 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

625006-9257-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Extensi...
Application	Extend		



Contour Arm

625006-3082-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-3255-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Length (L)	7.0 mm	Length 1 (L1)	5.0 mm
Angle 1 (W1)	24.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

625006-3100-000

Product Type	Stylus Tip	Length (L)	21.0 mm
Length 1 (L1)	13.0 mm	Angle 1 (W1)	24.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

625006-3262-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

000000-1059-167

Measuring Sensor	Surfcom Flex, 1...	Product Type	Surface Stylus
Length (L)	33.5 mm	Length 1 (L1)	7.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3092-000

Product Type	Stylus Tip	Length (L)	60.0 mm
Length 1 (L1)	52.0 mm	Angle 1 (W1)	12.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

000000-1433-416

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 30.5 mm
Angle 1 (W1)	90.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3097-000

Product Type	Stylus Tip	Length (L)	21.0 mm
Length 1 (L1)	13.0 mm	Angle 1 (W1)	24.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

625006-3119-000

Product Type	Stylus Tip	Length (L)	21.0 mm
Length 1 (L1)	13.0 mm	Stylus Tip Mate...	Ruby
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

000000-1365-332

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 4.625 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



NO IMAGE AVAILABLE

Contour Arm

000000-1458-708

Product Type	Stylus Tip
--------------	------------



Contour Arm

625006-9138-000

Product Type	Stylus Tip	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

625006-4098-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	13.0 mm
Application	Tactile		

31 products

Sort results
Recommended

Change view



Contour Arm

625006-4097-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	26.0 mm
Application	Tactile		



Contour Arm

625006-9424-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exten...
Application	Extend		



Contour Arm

000000-1084-495

Measuring Sensor	Surfcom Flex, 13...	Product Type	Surface Stylus
------------------	---------------------	--------------	----------------

Length (L)	73.5 mm	Length 1 (L1)	1.7 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

000000-1794-625

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

626108-6003-020

Measuring Sensor	Surfcom 3000/5000	Product Type	Contour Stylus
LH	50.0 mm	LV	- 4.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Application	Tactile		



Contour Arm

000000-1079-358

Measuring Sensor	Surfcom Flex, 13...	Product Type	Surface Stylus
------------------	---------------------	--------------	----------------

Length (L)	33.5 mm	Length 1 (L1)	15.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

000000-1373-770

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	130.0 mm	LV	- 15.5 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

626108-6002-020

Measuring Sensor	Surfcom 3000/5000	Product Type	Contour Stylus
LH	125.0 mm	LV	- 34.75 mm
Stylus Tip Mate...	Ruby	Application	Tactile



Contour Arm

625006-3083-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	21.0 mm
Application	Tactile		



Contour Arm

000000-1365-331

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 5.025 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

000000-1459-403

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

626108-6000-020

Measuring Sensor	Surfcom 3000/5000	Product Type	Contour Stylus
------------------	-------------------	--------------	----------------

LH	50.0 mm	LV	- 29.75 mm
Application	Tactile		



Contour Arm

000000-1365-333

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 30.5 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3098-000

Product Type	Stylus Tip	Length (L)	60.0 mm
Length 1 (L1)	52.0 mm	Angle 1 (W1)	24.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

625006-9431-000			
Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-9423-000			
Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exten...
Application	Extend		



Contour Arm

625006-3253-000			
Measuring Sensor	Contourecord	Product Type	Stylus Arm Exten...
Length (L)	65.0 mm	Length 1 (L1)	3.5 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

000000-1433-410

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 14.35 mm
Angle 1 (W1)	40.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3256-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exten...
Length (L)	3.5 mm	Length 1 (L1)	1.5 mm
Angle 1 (W1)	24.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

625006-4099-000


Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	115.0 mm	Length 1 (L1)	17.0 mm
Application	Tactile		



Contour Arm

625006-9255-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exten...
Application	Extend		



Contour Arm

000000-1463-971

Measuring Sensor	Surfcom 2000	Product Type	Contour Stylus
LH	150.0 mm	LV	- 21.5 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Tactile		



Contour Arm

625006-9223-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



NO IMAGE AVAILABLE

131 products

Sort results
Recommended

Change view



Contour Arm

000000-1433-396

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3081-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	115.0 mm	Length 1 (L1)	17.0 mm
Application	Tactile		



Contour Arm

000000-1365-330

Measuring Sensor	Surfcom 2000	Product Type	Contour Stylus
LH	130.0 mm	LV	- 21.5 mm

Angle 1 (W1)	24.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Tactile		



Contour Arm

625006-9248-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-3096-000

Product Type	Stylus Tip	Length (L)	34.0 mm
Length 1 (L1)	26.0 mm	Angle 1 (W1)	24.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

000000-1079-360

Measuring Sensor	Surfcom Flex, 1...	Product Type	Surface Stylus
------------------	--------------------	--------------	----------------

Length (L)	73.5 mm	Length 1 (L1)	15.0 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9254-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Exte...
Application	Extend		



Contour Arm

000000-1365-334

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 14.35 mm
Angle 1 (W1)	30.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9253-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

625006-3099-000

Product Type	Stylus Tip	Length (L)	34.0 mm
Length 1 (L1)	26.0 mm	Angle 1 (W1)	24.0 °
Stylus Tip Mate...	Tung. Carb.	Stylus Tip Geo...	Pointer
Application	Tactile		



Contour Arm

000000-1365-329

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
LH	65.0 mm	LV	- 14.35 mm
Angle 1 (W1)	60.0 °	Stylus Tip Mate...	Diamond
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-9426-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

625006-3336-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	13.0 mm
Application	Tactile		



Contour Arm

625006-9437-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm Ext...
Application	Extend		



Contour Arm

000000-1433-395

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3102-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Length (L)	65.0 mm	Length 1 (L1)	8.0 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

625006-3275-000

Product Type	Stylus Tip	Length (L)	21.0 mm
Length 1 (L1)	13.0 mm	Stylus Tip Mate...	Ruby
Stylus Tip Geo...	Pointer	Application	Tactile



Contour Arm

625006-3337-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm
Length (L)	178.5 mm	Length 1 (L1)	52.0 mm
Application	Tactile		



Contour Arm

625006-4087-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Length (L)	65.0 mm	Length 1 (L1)	12.0 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		





Contour Arm

625006-9201-000

Measuring Sensor	Surfcom NEX 1xx	Product Type	Stylus Arm
Application	Tactile		



Contour Arm

625006-4096-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Application	Extend		



Contour Arm

625006-3257-000

Measuring Sensor	Contourecord	Product Type	Stylus Arm Exte...
Length (L)	12.0 mm	Length 1 (L1)	2.9 mm
Angle 1 (W1)	12.0 °	Stylus Tip Mate...	Tung. Carb.
Application	Extend		



Contour Arm

000000-0483-877

Measuring Sensor	Surfcom 2000	Product Type	Surface Stylus
Stylus Tip Geo...	Pointer	Application	Tactile



**T* UV filter and
T* POL filter (circular)**
Quality from ZEISS.



The name ZEISS has been synonymous with quality down to the last detail ever since Carl Zeiss opened his optical workshop in 1846.

Your photos now also benefit from this quality. Demanding photographers know that a perfect photo requires perfect conditions: the subject, of course, but primarily the camera equipment. For this reason, ZEISS offers lenses that more than meet these demands. The offer is rounded off with the right UV and POL filters featuring the T*® anti-reflective coating from ZEISS – for exceptional quality. **Ensuring that your photo is incomparable. Each time.**



Featuring T* anti-reflective coating

Crystal clear: the UV filters featuring the T* anti-reflective coating from ZEISS provide optimal protection for the front element of your lens. They also ensure absolute brilliance without altering the color rendition or exposure time.




Location: Bonneville Salt Flats, Utah, USA
Date: 29th October 2010
Filter: ZEISS T* UV filter




For colors as rich
as in nature.


Technical data
ZEISS T* UV filter

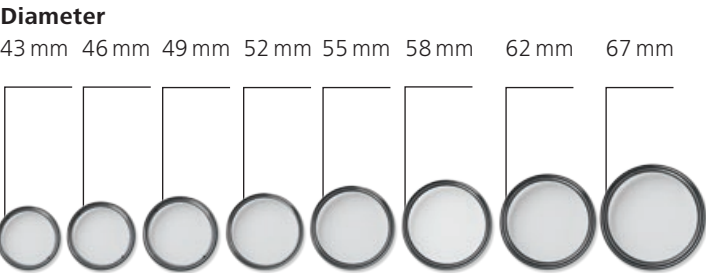

- Quality** High-quality glass featuring ZEISS T* anti-reflective coating.
- Flexibility** High fit accuracy for fast filter change.
Can be used with a lens shade.
- Compatibility** Ideal for ZEISS lenses. Can be used with non-ZEISS lenses.
- Effect** Optimal protection of the front lens element and more clarity for your photograph.

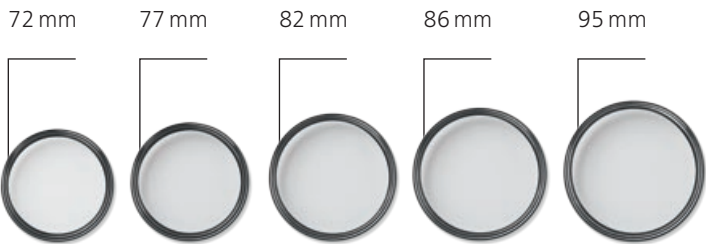


ZEISS T* UV filter

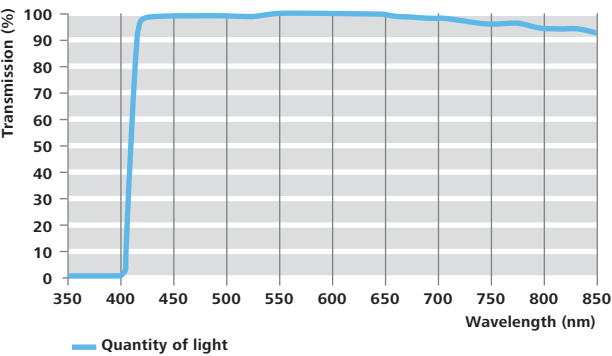




Featuring T* anti-reflective coating

Discover something new: the POL filters featuring the T* anti-reflective coating from ZEISS provide you with entirely new photographic insights by avoiding reflections on non-metallic surfaces. Experience a new definition of color and contrast.

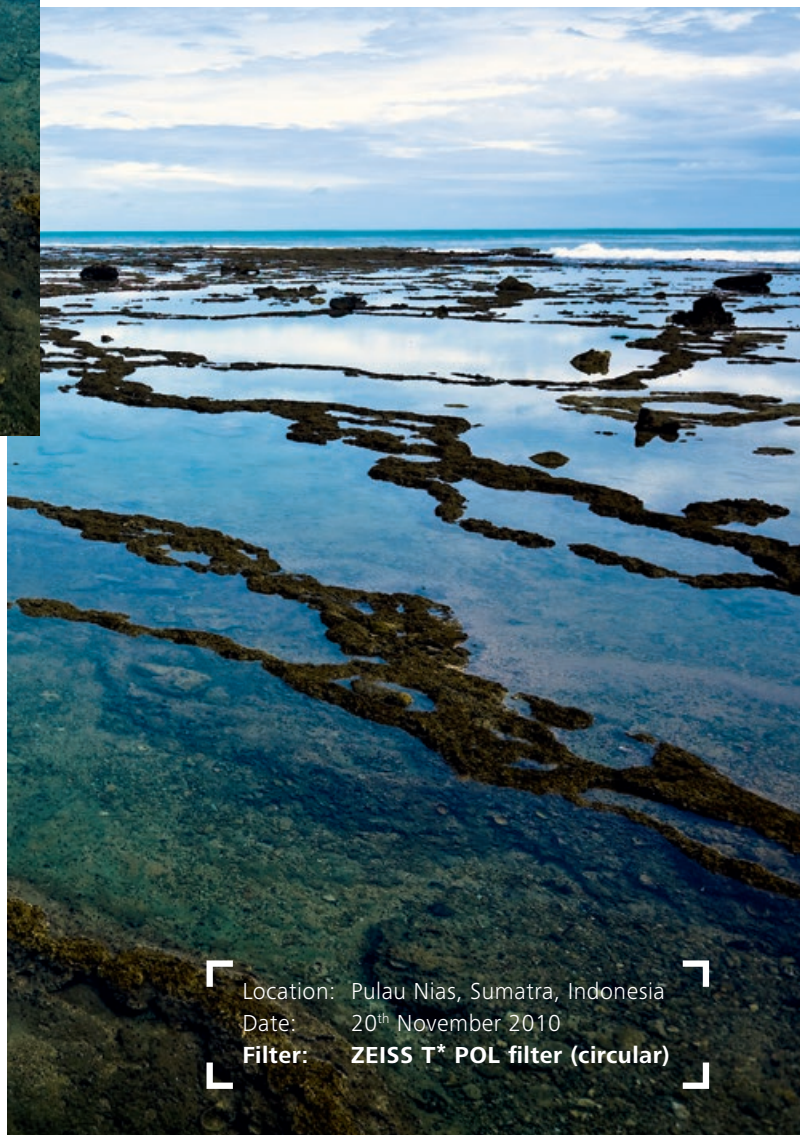


Location: Pulau Nias, Sumatra, Indonesia
Date: 20th November 2010
Filter: ZEISS T* POL filter (circular)




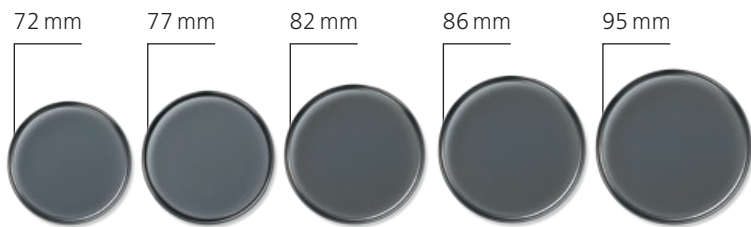

ZEISS T* POL filter (circular)

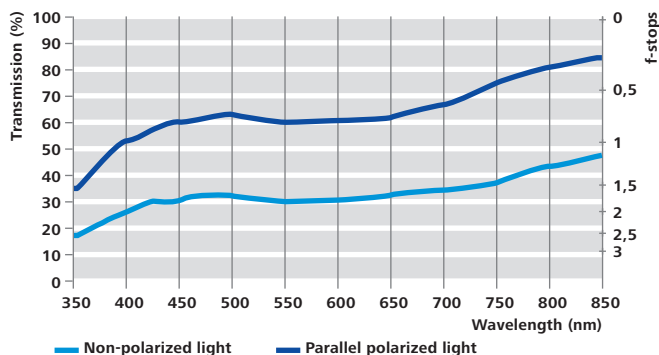

ZEISS T* POL filter (circular)

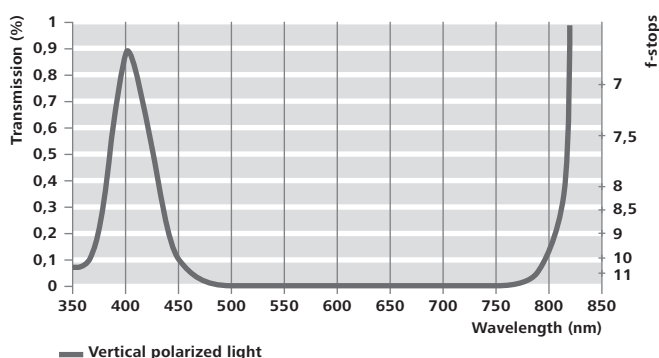


**For photos that
become revelations.**

Technical data

ZEISS T* POL filter (circular)

Diameter

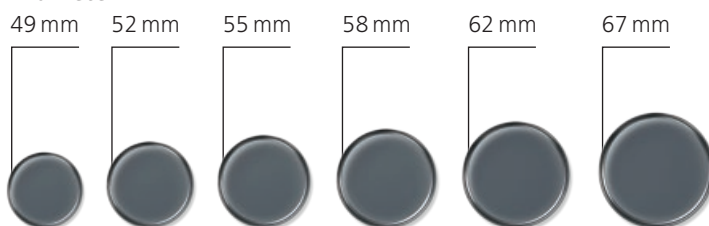

Precision

Rotary mount to set the filter effect (light reduction: 1.5–2 EV).

Quality

High-quality glass featuring ZEISS T* anti-reflective coating.

Flexibility

High fit accuracy for fast filter change. Can be used with a lens shade.

Compatibility

Ideal for ZEISS lenses. Can be used with non-ZEISS lenses.

Effect

Minimizes light reflections on non-metallic surfaces and increases the color saturation of long-distance shots.



Ingredient datasheet

according to 648/2004/EC: Regulation on detergents (Section D of Annex VII)

Spray in Lens Cleaning Kit (2096-685)

AQUA
BUTOXYDIGLYCOL
DIMETHYLOL GLYCOL
GLUTARAL
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Datenblatt über Inhaltsstoffe

gemäß 648/2004/EG: Verordnung über Detergenzien (Anhang VII, Abschnitt D)

Spray in Lens Cleaning Kit (2096-685)

AQUA
BUTOXYDIGLYCOL
DIMETHYLOL GLYCOL
GLUTARAL
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Fiche d'information sur les composants

selon 648/2004/CE: Règlement aux détergents (section D de l'annexe VII)

Spray in Lens Cleaning Kit (2096-685)

AQUA
BUTOXYDIGLYCOL
DIMETHYLOL GLYCOL
GLUTARAL
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Datenblatt über Inhaltsstoffe

gemäß 648/2004/EG: Verordnung über Detergenzien (Anhang VII, Abschnitt D)

Wipes in Lens Cleaning Kit (2096-685)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Ingredient datasheet

according to 648/2004/EC: Regulation on detergents (Section D of Annex VII)

Wipes in Lens Cleaning Kit (2096-685)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Fiche d'information sur les composants

selon 648/2004/CE: Règlement aux détergents (section D de l'annexe VII)

Wipes in Lens Cleaning Kit (2096-685)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Ingredient datasheet

according to 648/2004/EC: Regulation on detergents (Section D of Annex VII)

Lens Cleaning Spray (2096-686)

AQUA
BUTOXYDIGLYCOL
DIMETHYLOL GLYCOL
GLUTARAL
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Datenblatt über Inhaltsstoffe

gemäß 648/2004/EG: Verordnung über Detergenzien (Anhang VII, Abschnitt D)

Lens Cleaning Spray (2096-686)

AQUA
BUTOXYDIGLYCOL
DIMETHYLOL GLYCOL
GLUTARAL
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Fiche d'information sur les composants

selon 648/2004/CE: Règlement aux détergents (section D de l'annexe VII)

Lens Cleaning Spray (2096-686)

AQUA
BUTOXYDIGLYCOL
DIMETHYLOL GLYCOL
GLUTARAL
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Ingredient datasheet

according to 648/2004/EC: Regulation on detergents (Section D of Annex VII)

Lens Cleaning Wipes (2096-687)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Datenblatt über Inhaltsstoffe

gemäß 648/2004/EG: Verordnung über Detergenzien (Anhang VII, Abschnitt D)

Lens Cleaning Wipes (2096-687)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Fiche d'information sur les composants

selon 648/2004/CE: Règlement aux détergents (section D de l'annexe VII)

Lens Cleaning Wipes (2096-687)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Ingredient datasheet

according to 648/2004/EC: Regulation on detergents (Section D of Annex VII)

Lens Cleaning Wipes (200pcs) (2203-468)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Datenblatt über Inhaltsstoffe

gemäß 648/2004/EG: Verordnung über Detergenzien (Anhang VII, Abschnitt D)

Lens Cleaning Wipes (200pcs) (2203-468)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Fiche d'information sur les composants

selon 648/2004/CE: Règlement aux détergents (section D de l'annexe VII)

Lens Cleaning Wipes (200pcs) (2203-468)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Ingredient datasheet

according to 648/2004/EC: Regulation on detergents (Section D of Annex VII)

Spray in Lens Cleaning Kit (2390-186)

AQUA
SODIUM LAURETH SULFATE
GLUTARAL
PERFLUOROALKYLETHER
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
PARFUM
IODOPROPYNYL BUTYLCARBAMATE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Datenblatt über Inhaltsstoffe

gemäß 648/2004/EG: Verordnung über Detergenzien (Anhang VII, Abschnitt D)

Spray in Lens Cleaning Kit (2390-186)

AQUA
SODIUM LAURETH SULFATE
GLUTARAL
PERFLUOROALKYLETHER
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
PARFUM
IODOPROPYNYL BUTYLCARBAMATE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Fiche d'information sur les composants

selon 648/2004/CE: Règlement aux détergents (section D de l'annexe VII)

Spray in Lens Cleaning Kit (2390-186)

AQUA
SODIUM LAURETH SULFATE
GLUTARAL
PERFLUOROALKYLETHER
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
PARFUM
IODOPROPYNYL BUTYLCARBAMATE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Ingredient datasheet

according to 648/2004/EC: Regulation on detergents (Section D of Annex VII)

Wipes in Lens Cleaning Kit (2390-186)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Datenblatt über Inhaltsstoffe

gemäß 648/2004/EG: Verordnung über Detergenzien (Anhang VII, Abschnitt D)

Wipes in Lens Cleaning Kit (2390-186)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Fiche d'information sur les composants

selon 648/2004/CE: Règlement aux détergents (section D de l'annexe VII)

Wipes in Lens Cleaning Kit (2390-186)

AQUA
PERFLUOROALKYLETHER
SODIUM LAURETH SULFATE
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
GLUTARAL
IODOPROPYNYL BUTYLCARBAMATE
TRIETHANOLAMINE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Ingredient datasheet

according to 648/2004/EC: Regulation on detergents (Section D of Annex VII)

Lens Cleaning Spray (2390-368)

AQUA
SODIUM LAURETH SULFATE
GLUTARAL
PERFLUOROALKYLETHER
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
PARFUM
IODOPROPYNYL BUTYLCARBAMATE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Datenblatt über Inhaltsstoffe

gemäß 648/2004/EG: Verordnung über Detergenzien (Anhang VII, Abschnitt D)

Lens Cleaning Spray (2390-368)

AQUA
SODIUM LAURETH SULFATE
GLUTARAL
PERFLUOROALKYLETHER
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
PARFUM
IODOPROPYNYL BUTYLCARBAMATE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE



Fiche d'information sur les composants

selon 648/2004/CE: Règlement aux détergents (section D de l'annexe VII)

Lens Cleaning Spray (2390-368)

AQUA
SODIUM LAURETH SULFATE
GLUTARAL
PERFLUOROALKYLETHER
SODIUM LAURYL SULFATE
LAURAMINE OXIDE
PARFUM
IODOPROPYNYL BUTYLCARBAMATE
METHYLCHLOROISOTHIAZOLINONE AND METHYLISOTHIAZOLINONE

ZEISS Comfort Camera Strap

Ensure comfortable carrying of your equipment.

The ZEISS comfortable camera straps ensure that carrying your equipment does not lead to shoulder and neck strain, even when used for longer periods.



ZEISS Comfort Camera Strap

- High wearing comfort thanks to patented Air Cell padding
- Wide, highly elastic neoprene straps
- Maximum durability thanks to high-quality workmanship
- Particularly suitable for SLR cameras and binoculars
- Quick-release fasteners for fast and easy attachment and removal
- Adjustable length for all applications

ZEISS Lens Gear

Attached in a flash.

ZEISS Lens Gears make ZEISS Otus, ZEISS Milvus and ZEISS Loxia lenses a proper cine-style lens for professional filmmakers. The ZEISS Lens Gears are available in five different sizes.



Holding one ring firmly, turn the other clockwise to attach the lens and counter-clockwise to remove it.

They are supplied with a rubbercovered band, the GumGum, which features an adhesive surface. This means the inner diameter can be reduced according to the lens diameter, thus supporting multiple lenses. The GumGum also protects against scratches and other damage to the focus ring of the lens.

Mini	Small	Medium	Medium Makro 100	Large
------	-------	--------	------------------	-------

62 – 69 mm	71 – 77 mm	78 – 84 mm	78 – 84 mm	86 – 93 mm
60 – 67 mm (with GumGum)	69 – 75 mm (with GumGum)	76 – 82 mm (with GumGum)	76 – 82 mm (with GumGum)	84 – 91 mm (with GumGum)

Introduction Video

- Quick mounting – no tools needed
- Made of lightweight aluminum
- Hardened surface coating
- Features a 0.8 pitched gear
- Follow focus runs smoother than ever before
- No more screwdrivers, worn-out belts or straps that stick out

Otus Lenses

Lens	ZEISS Lens Gear	ZF.2	ZE	E
ZEISS Otus 1.4/28	Large	•	•	
ZEISS Otus 1.4/55	Medium	•	•	
ZEISS Otus 1.4/85	Large	•	•	

Milvus Lenses

Lens	ZEISS Lens Gear	ZF.2	ZE	E
ZEISS Milvus 2.8/15	Medium	•	•	
ZEISS Milvus 2.8/18	Small (with GumGum)	•	•	
	Small		•	
ZEISS Milvus 2.8/21	Small (with GumGum)	•	•	
ZEISS Milvus 1.4/25	Medium	•	•	
ZEISS Milvus 1.4/35	Medium	•	•	
ZEISS Milvus 2/35	Mini	•		
	Small		•	
ZEISS Milvus 1.4/50	Medium	•	•	
ZEISS Milvus 1.4/85	Large	•	•	
ZEISS Milvus 2/135	Large (with GumGum)	•	•	
ZEISS Milvus 2/50M	Medium (with GumGum)	•	•	
ZEISS Milvus 2/100M	Medium Makro 100 (with GumGum)	•	•	

Loxia Lenses

Lens	ZEISS Lens Gear	ZF.2	ZE	E
ZEISS Loxia 2.8/21	Mini with GumGum			•
ZEISS Loxia 2.4/25	Mini with GumGum			•
ZEISS Loxia 2/35	Mini with GumGum			•
ZEISS Loxia 2/50	Mini with GumGum			•
ZEISS Loxia 2.4/85	Mini with GumGum			•

ZEISS Metal Housings

Protect your ZEISS Secacam from theft and vandalism.



Enhance the security of your ZEISS Secacam cameras with our custom-made metal housings. The precise cutouts for the lens, infrared sensor, and black LED fields do not compromise recording quality.

Our robust cases provide top-notch protection against rain, splashes, dust, and dirt – ideal for outdoor use. The easy and secure installation is facilitated by two standard tripod thread openings on the back. Effortlessly attach the cameras with tripod mounts to trees or other objects and secure them with a standard cable lock through the eyelets on the back. Utilize our reliable metal housings for a secure and flexible outdoor installation.

Suitable for the ZEISS Secacam 7:

90 x 137 x 147 mm (3.5 x 5.4 x 5.8")

Suitable for the ZEISS Secacam 5:

81 x 125 x 133 mm (3.2 x 4.9 x 5.2")

ZEISS Solar-Panel

Optimize your ZEISS Secacam trail camera with our solar panel.



Get the best out of your trail camera and extend the operating time with our high-quality solar panel:

Easy installation, reliable performance

Our solar panel is easy to install and provides continuous power for your trail camera. No more changing batteries or worrying about dead batteries.

Environmentally friendly and money-saving

With our solar panel, you use solar energy to power your trail camera. This is not only environmentally friendly, but also reduces your operating costs. No more expensive batteries - rely on a sustainable energy source.

Robust and weatherproof

Our solar panel is robustly built and has an IP66 rating, which protects it from dust and heavy rain. Our solar solution delivers reliable power so you can rely on your trail camera when it matters most.

ZEISS Padlock

Ideal to secure the ZEISS Secacam in a metal housing.



The ZEISS Padlock is ideal to secure the Secacam in a metal housing. Manufactured by ABUS, its guaranteed to be robust and secure.

ZEISS Tree Band

The best way of mounting your ZEISS Secacam to a tree.



The ZEISS Tree Band is the standard way of mounting your Secacam to a tree. With its length of 1,5 m it usually is enough to wrap around most trees. Sometimes though, the circumference of a tree might be bigger. For this case, users can now acquire an extra tree band in order to reach the desired length. For that you just connect one band to another. Additionally, they can be used as replacements, should one break.

ZEISS Battery Tray

Replace the batteries of your ZEISS Secacam 7 fast and easy.



The ZEISS Battery Tray for Secacam 7 is a useful accessory, as it allows you to prefill the tray with fresh batteries before going out to your camera to replace the empty batteries in your camera. By doing so you just need to swap out the trays and this can even be done while wearing gloves.

Note:

Only available for ZEISS Secacam 7.

ZEISS 4G Antenna

Ensure that you capture every moment with seamless connectivity.



ZEISS 4G replacement antenna. Designed for superior signal reception, this high-quality antenna ensures that you capture every moment with crystal-clear images and seamless connectivity.

DESIGNED FOR PRECISION.
ZEISS ACCESSORIES.

Bullet Drop Compensator (ASV)	Order no.
 LongRange (ASV LR) for ZEISS V8 1.8–14×50, 2.8–20×56 for elevation (new orders) for windage (new orders)	-040
	-050
 Advanced LongRange (ASV-ALR) for ZEISS V8 4.8–35×60 for elevation (new orders) for windage (new orders)	-040
	-050
 ASV+ for Victory HT for elevation (new orders) for elevation and windage (new orders)	-010
	-020
 BT V6 for Conquest V6 Ballistic turret (BT) External windage (EW)	-060
	-070

Throw Lever	Order no.
 for ZEISS V8 and Conquest V6 for Conquest V4	2224-899
	2248-168

Flip Cover	Order no.
 for ZEISS V8, Victory HT	
Ø 30 mm	2152-898
Ø 50 mm	2105-737
Ø 56 mm	2105-798
Ø 60 mm	2173-926

Neoprene Cover	Order no.
	
Size S for V8 1.1–8×24, V6 1.1–6×24, V4 1–4×24 models	2231-631
Size M for HT 2.5–10×50, V6 2–12×50, V6 3–18×50, V4 4–16×44 models	2231-632
Size L for V8 1.8–14×50, V8 2.8–20×56, HT 3–12×56, V6 2.5–15×56, V6 5–30×50, V4 3–12×56, V4 6–24×50 models	2231-633
Size XL for V8 4.8–35×60 model	2231-634

Sunshades	Order no.
 for ZEISS V8, Victory HT, Conquest V6 and Conquest V4	
Ø 44 mm	529860-0001-000
Ø 50 mm	529860-0002-000
Ø 56 mm	529860-0003-000

PERFECTLY PREPARED.
ZEISS ACCESSORIES.

DTC 3 adapter	Order no.
DTC-R M52 (one size)	52 83 30
DTC-A 48 for riflescopes with a lens diameter of 42 mm	 52 83 32
DTC-A 56 for riflescopes with a lens diameter of 50 mm	52 83 33
DTC-A 62 for riflescopes with a lens diameter of 56 mm	52 83 34
Interchangeable lens for ZEISS DTI 6	 Order no.
20 mm focal length	52 70 21
40 mm focal length	 52 70 22
Battery for ZEISS DTI 6	 Order no.
Li-ion battery rechargeable	2450-741
Charging cradle	 2485-345

COMPLETES THE EQUIPMENT.
ZEISS ACCESSORIES.

Carrying Case	Order no.
for Victory Harpia 85 (pictured)	2169-977
for Victory Harpia 95	2169-976
for Conquest Gavia 85	2169-979
Professional Tripod for all spotting scopes	 Order no.
2169-972	2169-972
Tripod Plate Long Balance Plate (only available for the Professional tripod) for Victory Harpia	 Order no.
2169-974	2169-974
ZEISS Photo Adapter Astro Adapter for Conquest Gavia	 Order no.
52 83 45	52 83 45
M49 for Victory Harpia	 52 83 57-9901
for Conquest Gavia	52 83 48-9901
M52 for Victory Harpia	 52 83 57-9902
for Conquest Gavia	52 83 48-9902
M58 for Victory Harpia	 52 83 57-9903
for Conquest Gavia	52 83 48-9903



INCREASES PERFORMANCE.

ZEISS ACCESSORIES.



Tripod Adapter		Order no.
	Binofix universal tripod mount for all binocular models	52 83 87
	¼" tripod adapter for Conquest HD (included with the HD 15×56)	52 83 88
Magnification Attachment		Order no.
	Mono 3 × 12 incl. carrying strap and leather pouch; triples normal binocular magnification	52 20 12
	Adapter for Magnification Attachment	Order no.
	for Victory FL/RF/HT (not SF) and Conquest HD 32 and 42	52 83 77
	for Conquest HD 56 & Victory RF	52 83 79
Accessories for Victory NV 5.6×62		Order no.
	SLR camera adapter	52 30 06-9007
	1" flashlight mount	52 30 06-9006
	Mini Maglite adapter	52 30 06-9008
Carrying strap		Order no.
	Air Cell Comfort straps	52 91 13
	Comfort Cross straps for binoculars	52 91 15

Cordura Pouches		Order no.
	for DTI 3/35 and DTI 3/25	2374-931
	for Victory SF 32/SFL 40 (pictured)	2238-133
	for Victory HT 54	2074-447
	for Conquest HD 32/Terra ED 32 (pictured)	52 90 35
	for Conquest HD 42/Terra ED 42 (pictured)	1976-008
	for Conquest HD 56	1379-711
Pouches		Order no.
	Victory SF 42/RF 42 (pictured)	2060-069
	Victory RF 54	2214-573
	Victory Pocket	2165-340
	Terra ED Pocket	2197-806
	Terra ED 32 (pictured)	2196-165
	Terra ED 42 (pictured)	2196-167
	Leather pouch for 20×60 S	52 90 83



TECHNICAL SPECIFICATIONS.

Victory	Monos					
Model	3 × 12	4 × 12	6 × 18	8 × 20	10 × 25	MiniQuick® 5 × 10
Magnification	3 ×	4 ×	6 ×	8 ×	10 ×	5 ×
Objective lens diameter	12 mm		18 mm	20 mm	25 mm	10 mm
Exit pupil diameter	4 mm	3 mm		2.5 mm		2 mm
Twilight factor	6	6.9	10.4	12.6	15.8	7
Field of view (1,000 m)	220 m	180 m	120 m	110 m	88 m	100 m
Subjective viewing angle	38°	41°		51°		29°
Close focusing distance	0.2 m	0.25 m	0.3 m	3 m	4.5 m	4 m
Diopter adjustment range	± 4 D					
Exit pupil distance	12 mm	15 mm				16.5 mm
Lens type	Achromatic					
Prism system	Schmidt-Pechan					—
Waterproof	Splash-proof					
Operating temperature	-20 / +40 °C					
Height × width	58 mm	70 mm	94 mm	101 mm	119 mm	113 mm
Weight	54 g	45 g	58 g	67 g	77 g	23 g
Order no.	52 20 12	52 20 50	52 20 51	52 20 52	52 20 53	52 20 10

All feature ZEISS T* multicoating.
Subject to changes in design and scope of delivery as a result of ongoing technical development.

	Binoculars with image stabilization
Model	20 × 60 S
Magnification	20 ×
Objective lens diameter	60 mm
Exit pupil diameter	3 mm
Twilight factor	34.6
Field of view (1,000 m)	52 m
Subjective viewing angle	60°
MOD	14 m
Diopter adjustment range	± 7 D
Exit pupil distance	13 mm
Interpupillary distance	57 – 73 mm
Lens type	Achromatic
Prism system	Porro
Waterproof	Splash-proof
Operating temperature	-20 / +40 °C
Height × width	275 × 161 mm
Weight	1,660 g
Order no.	52 60 00

Includes neoprene carrying strap, eyepiece cap, and aluminum case.
Subject to changes in design and scope of delivery as a result of ongoing technical development.

	Night Vision
Model	5.6 × 62 NV
Magnification	5.6 ×
Objective lens diameter	62 mm
Field of view (1,000 m)	142 m
MOD	5 m
Diopter adjustment range	+ / - 4 D
Exit pupil distance	20 mm
Coating	LotuTec®
Nitrogen filling	Yes
Length × width × height	233 × 100 × 80 mm
Weight	Approx. 1,000 g
Reticle: line spacing	0.5 m / 100 m
Measuring range/range	500 m
Order no.	52 30 07-9901

Package includes eyepiece and lens caps, carrying strap, cordura pouch, and two AA batteries.
Subject to changes in design and scope of delivery as a result of ongoing technical development.

TECHNICAL SPECIFICATIONS.



	Tripod	Long Balance Plate
Model	Professional	
Material	Carbon	
Length when closed	Approx. 700 mm	
Length when open	Approx. 1,820 mm	
Weight	Approx. 2,460 g	for the professional model
Order no.	21 69-972	21 69-974

Model	Astro Adapter for
1¼" astronomical telescopes	52 83 85
2" astronomical telescopes	52 83 86
Astro adapter for DiaScope	52 83 82





По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: zsf@nt-rt.ru || сайт: <https://zeiss.nt-rt.ru/>